

## MIXAMP-60

70V/100V Mixer Amp with Bluetooth, Tuner and MP3 Audio

The all-in-one solution for light commercial jobs including restaurants, retail stores, coffee shops, medical/dental offices, schools and more.



Versatile design for the most common installation requirements



Ideal for background music, mic and paging



All-in-one solution with integrated Bluetooth, FM tuner and portable media support, and the ability to connect up to four external sources



The right connections to make installs fast and efficient



Front panel controls to easily manage source volumes and Master Volume

### KEY SPECIFICATIONS

100V/70V/4Ω/8Ω/16Ω, 60 Watts

Rack-mountable (2U) with rack-mount ears included

1 XLR & 2 Phoenix mic connections, Phantom Power support for primary mic

3x mic/line inputs, 2 x RCA line inputs, 1 x TEL input and 1 x RCA line output


Short-circuit, clip, overload and high-temperature protection

MP3 media player, USB/SD & FM



# a sound relationship Russound

## MIXAMP-60 CONNECTION DIAGRAM

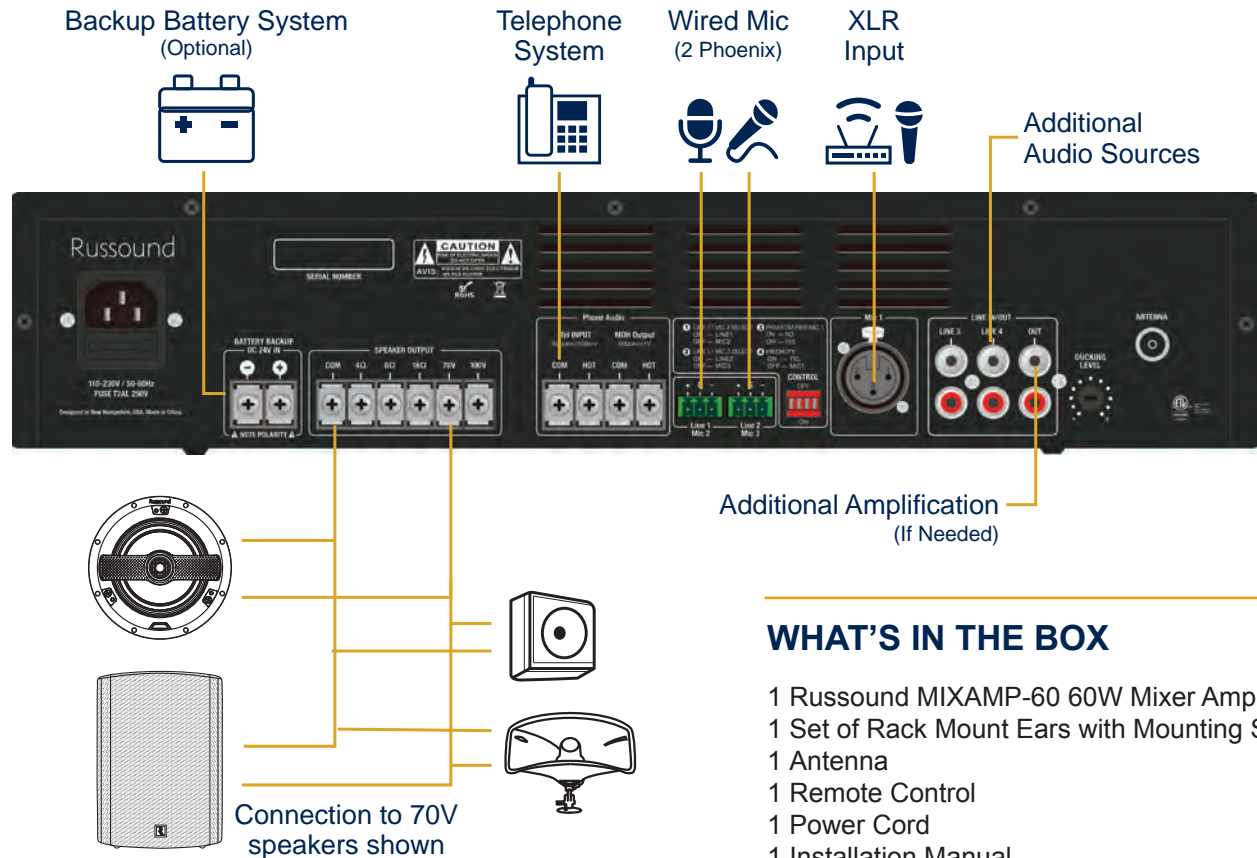

## WHAT'S IN THE BOX

- 1 Russound MIXAMP-60 60W Mixer Amplifier
- 1 Set of Rack Mount Ears with Mounting Screws
- 1 Antenna
- 1 Remote Control
- 1 Power Cord
- 1 Installation Manual

## SPECIFICATIONS

Rated Power Output	60W
Speaker Output	70V/100V/4Ω/8Ω/16Ω, RCA Line Out
Connectors	Mic1: Balanced XLR with Phantom Power Inputs 2-3: Mic/Line Switchable with Unbalanced 3-Conductor Phoenix Connector Line Inputs 1-2: Stereo RCA
Frequency Response	60Hz-15kHz(±3dB)
S/N Ratio	Line 85dB, Mic ≥72dB
THD	Less than 0.5%
Protection	Short-circuit, clip, overload and high-temp protection
Power Consumption	100W
Power Supply	110-230VAC, 50-60Hz
Chassis Dimensions	17 1/8"(W) x 3 1/2"(H) x 10 1/2"(D) / (435 x 89 x 267 mm)
Weight	9.5 lbs (4.3kg)