



American Bass
"Excellence In Sound"

XR-10D4

WORLD CHAMPIONS
WORLD LEADERS IN SPL PRODUCTS

American Bass USA 31200 Solon RD
Unit 4 Solon Ohio 44139
800 798 9311
Tel: 440 248 5858
Fax: 440 248 6022
E-mail: Info@americanbassusa.com
Website: www.americanbassusa.com

SUBWOOFER SPEAKER SYSTEM
OWNER'S MANUAL

Thank you for purchasing a **AMERICAN BASS** subwoofer. It is a state-of-the-art product specifically designed and engineered for vehicle use, and has been thoroughly tested to ensure consistent and reliable performance.



Should you have any questions regarding the installation or operation of your **AMERICAN BASS** subwoofer, which are not answered in this manual, please contact your dealer for assistance.

FEATURES

- 10" Subwoofer
- RMS / MAX Power : 1000W / 2000W
- Stitched Rubber Surround
- Fiberglass Reinforced Cone
- Dual 4 ohm 3" Aluminum Voice Coil
- 200 Oz Magnet Structure
- PVC Gasket Ring
- PVC Magnet Boot

PRECAUTIONS

- Before making holes, check the mounting space with supplied template.
- To prevent noise pick-up, keep the wiring away from motors, high-voltage leads and other potential noise sources.
- To prevent a short-circuit, keep all wiring away from moving parts and sharp edges.
- Make sure you carefully read and understand the installation instructions before installing this subwoofer in your vehicle.

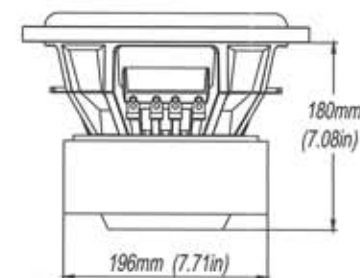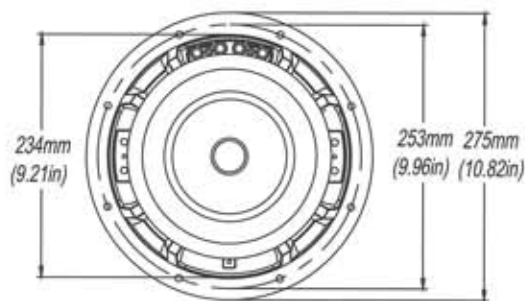

SPECIFICATIONS	XR-10D4
RMS / MAX Power (W)	1000 / 2000
Fo (Hz)	35
Nominal Impedance (Ω)	4+4
Sensitivity@1w/1m(dB)	88
Frequency Range	30Hz~500Hz
Magnet	200 Oz
Voice Coil	3"
Cone	Rubber Edge Paper Cone
Mounting Depth (inch)	7.087
Mounting Diameter (inch)	9.764