



WORLD CHAMPIONS
WORLD LEADERS IN SPL PRODUCTS

American Bass USA 31200 Solon RD
Unit 18 Solon Ohio 44139
800 798 9311
Tel: 440 248 5858
Fax: 440 248 6022
E-mail: Info@americanbassusa.com
Website: www.americanbassusa.com

American Bass
"Excellence In Sound"

ES-1044
ES-1244

SUBWOOFER SPEAKER SYSTEM
OWNER'S MANUAL

Thank you for purchasing a **AMERICAN BASS** subwoofer. It is a state-of-the-art product specifically designed and engineered for vehicle use, and has been thoroughly tested to ensure consistent and reliable performance.

Should you have any questions regarding the installation or operation of your **AMERICAN BASS** subwoofer, which are not answered in this manual, please contact your dealer for assistance.

FEATURES

ES-1044

10" Subwoofer
 RMS Power : 500W
 MAX Power : 1000W
 Stitched Rubber Surround
 Fiberglass Reinforced Cap
 DVC 4 ohm
 2.5" Aluminum Voice Coil
 65 Oz Magnet Structure
 PVC Gasket Ring



ES-1244

12" Subwoofer
 RMS Power : 800W
 MAX Power : 1500W
 Stitched Rubber Surround
 Fiberglass Reinforced Cap
 DVC 4 ohm
 2.5" Aluminum Voice Coil
 65 Oz Magnet Structure
 PVC Gasket Ring



PRECAUTIONS

- Before making holes, check the mounting space with supplied template.
- To prevent noise pick-up, keep the wiring away from motors, high-voltage leads and other potential noise sources.
- To prevent a short-circuit, keep all wiring away from moving parts and sharp edges.
- Make sure you carefully read and understand the installation instructions before installing this subwoofer in your vehicle.

ES-1044

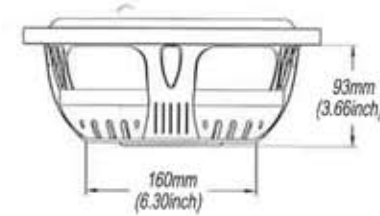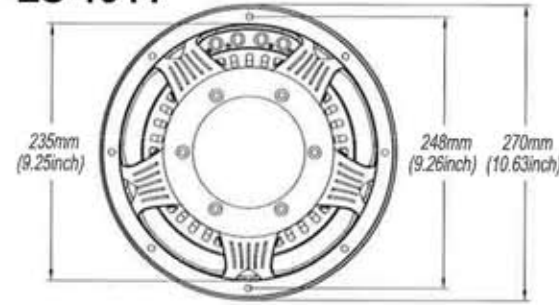

ES-1244

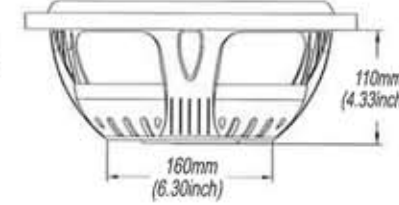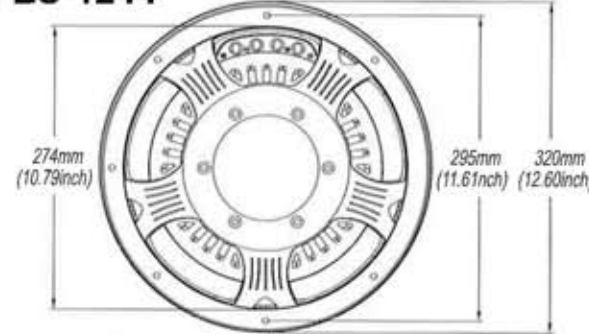

SPECIFICATIONS	ES-1044	ES-1244
RMS Power (W)	500	800
MAX Power (W)	1000	1500
Fo (Hz):	35	30
Nominal Impedance (Ω)	4+4	4+4
Sensitivity@1w/1m(dB)	86	84
Frequency Range	35Hz~500Hz	30Hz~500Hz
Magnet	65 Oz	65 Oz
Voice Coil	2.5"	2.5"
Cone	Rubber Edge Paper Cone	Rubber Edge Paper Cone
Mounting Depth (inch)	3.66	4.33
Mounting Diameter (inch)	9.25	10.79