

BIJOU SERIES 3100

ACP-BIJOU-3100




MAKING GOOD SOUND GREAT

Bijou 3100 is a compact, 3.1-channel high-power integrated amplifier for professional installations, delivering 100W per channel at 8 ohms. Featuring eARC decoding and GaN technology, it ensures highest-quality audio, supporting Dolby Atmos and DTS. Versatile connectivity options and IP control let installers deliver exceptional AV experiences in residential and light commercial settings.

The Bijou 3100 ups the channel ante to perfectly complement high-end, power-hungry passive soundbars. Left, Center, and Right game-changing GaN-fueled channels each punch well above their weight class, delivering 100 uncompressed pristine watts or more to launch the latest box office action soundtrack directly through to the living room's back wall. A line-level subwoofer output enhances TV viewing, while the automaton-friendly and web-configurable Bijou 3100 integrates seamlessly into any popular automation ecosystem.

Bijou 3100 Connection Diagram

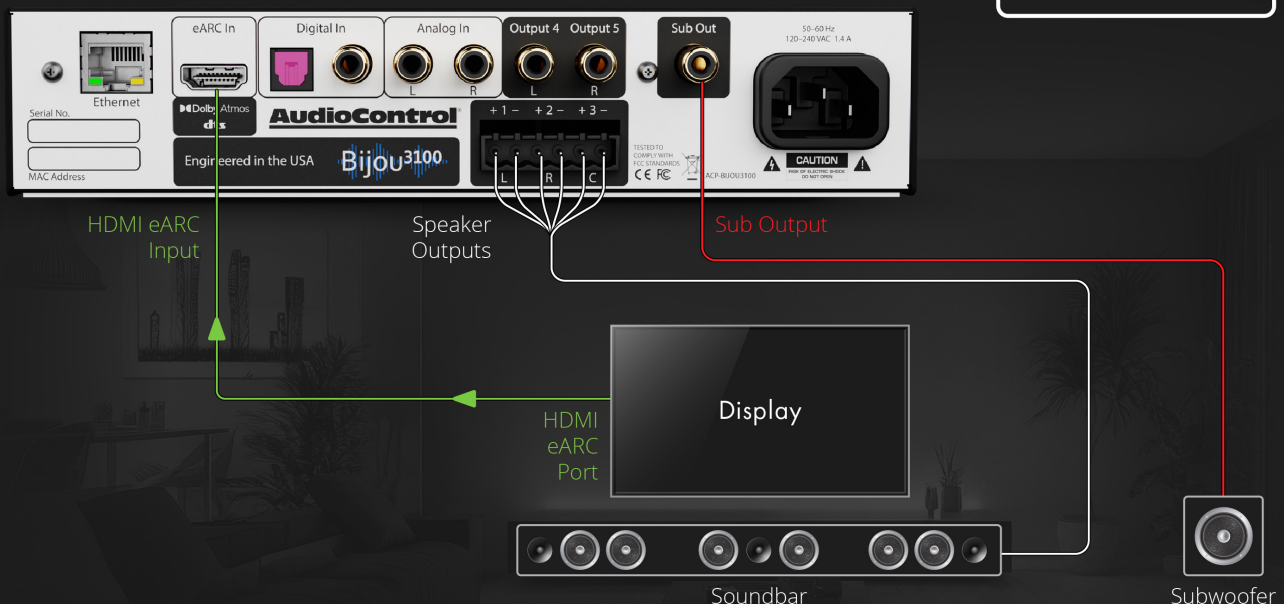

VESA MOUNTS ARE NOW AVAILABLE FOR ALL BIJOU AMPLIFIERS!

SPECS

INPUTS	
eARC Inputs	1 HDMI Audio-Only Input
Digital Inputs	1 Optical TOSLINK 1 Coax S/PDIF
Analog Inputs	Stereo L/R RCA single-ended
Analog Input Impedance	47 kOhms
Analog Input Sensitivity	2 Vrms
OUTPUTS	
Preamp Outputs	2 RCA single-ended
Sub Output	1 RCA single-ended
Speaker Level Outputs	3 outputs 6-pin Euroblock connector
Power Output	100 W into 8 Ω , 200 W into 4 Ω
AUDIO	
Minimum Speaker Load	4 ohms
Frequency Range	20 Hz to 20 kHz
Total Harmonic Distortion	0.15%
DAC	48kHz/24-bit
POWER	
Input Voltage	110 VAC to 240 VAC
Power Consumption	
Standby	3 W
Typical loud listening (1/8 th power)	125 W
Maximum	700 W
BTU/hr	
Standby	10 BTU/hr
Typical loud listening (1/8 th power)	340 BTU/hr
Maximum	2046 BTU/hr
DIMENSIONS	
Height	1.7 in (43.9 mm)
Width	8.3 in (211.3 mm)
Depth	11.9 in (302.2 mm)
Weight	6 lbs (2.7 kg)
Rack Space	0.5 RU

FEATURES

- **HDMI eARC input** transfers uncompressed high-bandwidth source audio, including Dolby Atmos, Dolby TrueHD, DTS, and DTS-HD Master Audio.
- **GaN-based high-power, hyper-performance, Class-D amplifier design**
- 100 watts RMS into 8 ohms, 200 watts into 4 ohms, all channels driven
- Analog and Digital Inputs; Analog Stereo Preamp and Subwoofer outputs
- IP and IR-Controllable for seamless third-party automation compatibility
- VESA Mount available
- **Next-generation GaN Semiconductor Amplification Technology:** The Bijou 3100 Class-D GaN amplification runs cool to the touch, enabling installation otherwise limited by traditional amplifier designs. GaN-based amplifier topologies achieve power conversion efficiencies in the 95% to 99% range, allowing higher output power in a more compact chassis size.
- **Compact Size:** GaN implementation requires less circuit board real estate and no ancillary device components to govern thermal convection, resulting in cool-running smaller chassis dimensions with more placement options.
- **HDMI eARC Input:** Video soundtracks from connected devices or internal streaming services feature immersive codecs like Dolby Atmos, or DTS surround audio. A unique eARC implementation for the Bijou Series enables GUI-assignable downmixing at the RCA outputs, enabling wireless headphone interfaces or Bluetooth adapters to provide private playback options. At the same time, original surround decoding continues at the powered speaker and subwoofer outputs.
- **Web Configurable and IP-, IR-Controllable:** AudioControl provides a programmer-friendly API to integrate the Bijou 3100 into any popular automation ecosystem. Setup configuration is intuitive and fast via the web interface. An included remote enables stand-alone IR control.

AudioControl®

(425) 775-8461

www.audiocontrolpro.com

Tech Support: techsupport@audiocontrolpro.com