



AC-MX82-AUHD

AC-MX82-AUHD-RM  
(RACK MOUNT VERSION)

**18GBPS 4K60 (4:4:4)**  
**8x2 MATRIX SWITCH**  
**AC-MX82-AUHD**


**HDR** **HDMI** **HDCP**  
HIGH-DEFINITION MULTIMEDIA INTERFACE HIGH-BANDWIDTH DIGITAL CONTENT PROTECTION

**IDEAL FOR OVERCOMING AVR ISSUES.** THE AC-MX82-AUHD IS A TRUE 8x2 HDMI MATRIX SWITCH. SUPPORTING HDMI 2.0(A/B), HDCP 2.2, UP TO 4K VIDEO RESOLUTION, AND UP TO 18GBPS BANDWIDTH. OPTIMAL FOR BYPASSING AVR'S THAT DO NOT SUPPORT FULL 18GBPS, BYPASS UNCOMPRESSED HDMI TO THE DISPLAY WHILE RUNNING DOWN-SCALED VIDEO INTO A LEGACY AVR. ONLY VIDEO IS REDUCED AND AUDIO REMAINS UNTOUCHED, MAKING IT AN IDEAL COMPONENT FOR SYSTEMS WHERE HIGH BIT RATE AUDIO IS CRITICAL.



This switch allows *any* source (Blu-ray, UHD Blu-ray, satellite receiver, game consoles, PCs, etc.) to be shown on *any* of the connected displays. This matrix equalizes and amplifies the output to ensure the HDMI signal can be transmitted through long HDMI cables without loss of quality. Many like this switch for the home theater, but it is also a conference room all-star. The auto-switching feature makes this unit an ideal, affordable, component for any conference room system. This is an excellent solution for digital entertainment centers, HDTV retail, show sites, data centers, schools, conference and training centers and more!

## AVPro edge AC-MX82-AUHD CONNECTION DIAGRAM

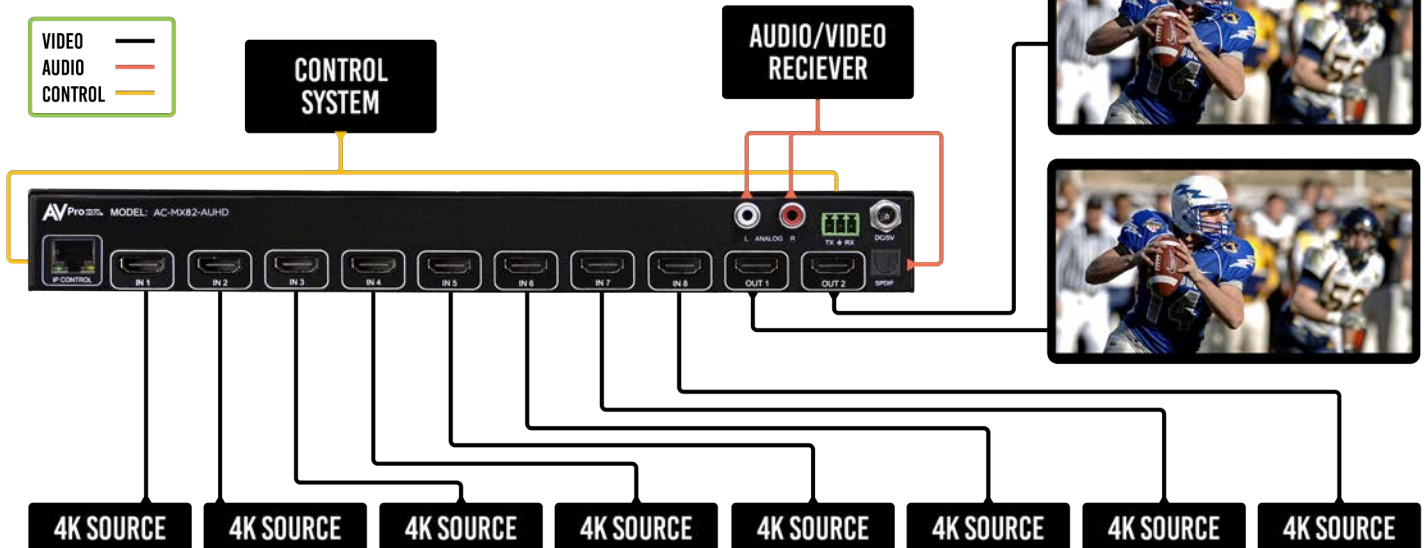

VIDEO	
VIDEO RESOLUTIONS	UP TO 4K 60HZ 4:4:4
VESA RESOLUTIONS	UP TO DCI 4K (4096X2160) 5K (UP TO 5120X3200)
HDR FORMATS/RESOLUTIONS	420, 422, 444 (10 AND 12 DEEP COLOR) HDR10, HDR10+, DOLBY VISION, HLG
COLOR SPACE	YUV (COMPONENT), RGB (CSC: REC. 601, REC. 709, BT2020, DCI, P3 D6500)
CHROMA SUBSAMPLING	4:4:4, 4:2:2, 4:2:0 SUPPORTED
DEEP COLOR	UP TO 16 BIT (1080), UP TO 12 BIT (4K)
AUDIO	
AUDIO FORMATS SUPPORTED (HDMI)	PCM 2.0 CH, LPCM 5.1 & 7.1, DOLBY DIGITAL, DTS 5.1, DOLBY DIGITAL PLUS, DOLBY TRUEHD, DTS-HD MASTER AUDIO, DTS-X, DOLBY ATMOS
AUDIO FORMATS SUPPORTED EXTRACTED (TOSLINK)	PCM 2 CH, LPCM 6 CH, LPCM 7 CH, DOLBY DIGITAL, DOLBY DIGITAL PLUS, DTS-HD MASTER AUDIO
AUDIO FORMATS SUPPORTED EXTRACTED (2CH PORT)	PCM 2 CH
AUDIO EXTRACTION LOCATION	FOLLOWS OUTPUT (SELECTABLE)
DISTANCE	
HDMI IN/OUT (4K60 4:4:4)	UP TO 50 FEET (USING BULLET TRAIN HDMI)
HDMI IN/OUT (W/ AOC CABLE) (4K60 4:4:4)	UP TO 130 FEET (USING BULLET TRAIN AOC)
OTHER	
BANDWIDTH	18 Gbps
HDCP	HDCP 2.2 AND EARLIER
CONTROL	
PORTS	LAN, RS232, IR WINDOW
DRIVERS	C4, RTI, ELAN, CRESTRON, URC (FOR MORE INFORMATION - SEE DRIVERS PAGE ON AVPROEDGE.COM/DRIVERS
LAN WebOS	YES
PORTS	
HDMI	TYPE A
LAN	RJ45 W/ WEB INTERFACE/CONTROL
AUDIO (EXTRACTED DIGITAL)	TOSLINK
AUDIO (EXTRACTED ANALOG)	L/R AUDIO
IR RX	WINDOW ONLY (REMOTE INCLUDED)
RS232	3 PIN TERMINAL BLOCK
ENVIRONMENTAL	
OPERATING TEMPRATURE	23 TO 125°F (-5 TO 51°C)
STORAGE TEMPERATURE	-4 TO 140°F (-20 TO 60°C)
HUMIDITY RANGE	5-90% RH (NO CONDENSATION)
POWER	
POWER CONSUMPTION (TOTAL)	12 WATTS MAX
POWER SUPPLY - MATRIX	INPUT: AC 100-240V ~ 50/60HZ OUTPUT: DC 12V 2A
DIMENSIONS	
DIMENSIONS (UNIT ONLY - HEIGHT/DEPTH/WIDTH)	MM: 33.54 X 111.12 X 28.98 INCH: 1.32 X 4.37 X 11.06
DIMENSIONS (PACKAGED HEIGHT/DEPTH/WIDTH)	MM: 76.2 X 184.1 X 317.5 INCH: 3 X 7.25 X 12.5
WEIGHT (UNIT)	1.8 LBS (.82 KG)
WEIGHT (PACKAGED)	3 LBS (1.36 KG)
DIMENSIONS - RACK MOUNTABLE VERSION (UNIT ONLY - HEIGHT/DEPTH/WIDTH)	MM: 20.5 X 94 X 232.98 INCH: .9 X 3.7 X 9.17
DIMENSIONS - RACK MOUNTABLE VERSION (PACKAGED HEIGHT/DEPTH/WIDTH)	MM: 86.61 X 171.45 X 482.6 INCH: 3.41 X 6.75 X 19
WEIGHT (UNIT) - RACK MOUNTABLE VERSION	3.2 LBS (1.45 KG)
WEIGHT (PACKAGED) - RACK MOUNTABLE VERSION	4.4 LBS (2 KG)

\*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MASS & DIMENSIONS ARE APPROXIMATE.

## FULL FEATURE SET

- HDMI 2.0(a/b)
- 18Gbps Bandwidth Support
- 4K60 4:4:4 Support
- Full HDR Support (HDR 10 & 12 Bit)
- Dolby Vision, HDR10+ and HLG Support
- HDCP 2.2 (and all earlier versions supported)
- 4K > 1080p Down Scaler (Out 1)
- Perfect AVR Bypass deliver 18Gbps to Display and uncompressed audio to AVR
- Advanced EDID Management
- IR, RS-232 and LAN Control Options
- Digital Toslink Out (7CH PCM, DD, DTS)
- Balanced Analog Out (2CH PCM)
- Down-scaling mode for mixed systems
- Driver Support for Crestron, C4, RTI, ELAN and more
- Extracted Audio Supports DD+, DTS Master Audio on Toslink
- Extracted Audio bound to output 1 or 2

## IN THE BOX

