



WDX10 MB12-8

12" 8Ω Midbass | 1200 Watts

FEATURES



- 3.5" High Temperature Voice Coil
- High Strength Ferrite Oxide magnet
- Treated Paper Cone with Cloth Surround
- Die-Cast Aluminum basket
- EVA Mounting gasket
- Compression Speaker terminals

SPECIFICATION

- Dynamic Power Handling: 1200 Watts
- Nominal Power Handling: 600 Watts
- Impedance: 8Ω Voice Coil
- Resonant Frequency (f_s): 52.8 Hz
- D.C. Voice Coil Resistance (R_e): 8Ω
- Mechanical Quality Factor (Q_{ms}): 2.94
- Electrical Quality Factor (Q_{es}): 0.44
- Total Quality Factor (Q_{ts}): 0.38
- Equivalent Air Volume (V_{as}): 44.9 L
- Mass of Diaphragm/Coil (M_{ms}): 77.4 g
- Force Factor (BL): 17.7
- Sound Pressure Level (SPL): 96.1dB

DIMENSIONS

- Outside Diameter: 12.36" / 314 mm
- Cutout Diameter: 11.02" / 280 mm
- Mounting Depth: 5.26" / 133.50 mm

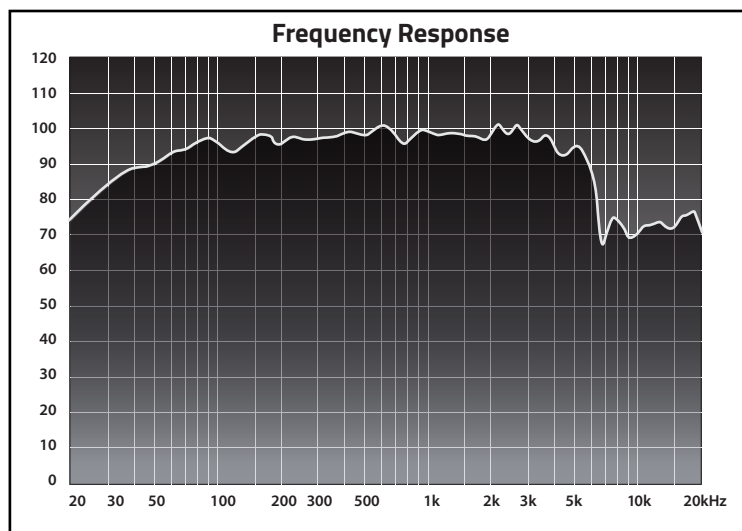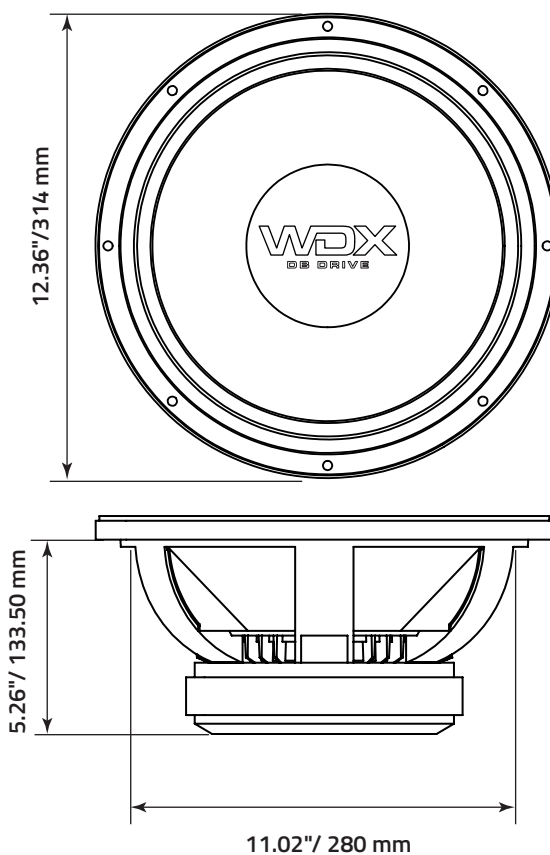



WDX10 MB12-8

12" 8Ω Midbass | 1200 Watts

CARACTERÍSTICAS

Bobina de 3.5" para alta temperatura
Imán de óxido de ferrita de alta resistencia
Cono de Papel Tratado con Borde de Tela
Canasta de Aluminio Fundido
Empaque de Montaje EVA
Terminales De Compresion

ESPECIFICACIONES

Manejo de potencia dinámica: 1200 Watts
Manejo de potencia nominal: 600 Watts
Impedancia: Bobina de 8 Ohms
Frecuencia resonante (fs): 52.8 Hz
Resistencia de la Bobina C.C. (Re): 8 Ohms
Factor de calidad mecánica (Qms): 2.94
Factor de calidad eléctrica (Qes): 0.44
Factor de calidad total (Qts): 0.38
Volumen de aire equivalente (Vas): 44.9 L
Masa del diafragma/bobina (Mms): 77.4 g
Factor de fuerza (BL): 17.7
Nivel de Presión Sonora (SPL): 96.1 dB

DIMENSIONES

Diametro Exterior: 12.36" / 314 mm
Diametro de Corte: 11.02" / 280 mm
Profundidad de Montaje: 5.26" / 133.50 mm

