


### MAIN FEATURES

6.5"/165 mm woofer  
 Pressed paper cone and rubber surround  
 25.5 mm woofer voice coil  
 Y25 10 oz ferrite woofer magnet  
 14 mm tweeter voice coil  
 N35 Neodymium tweeter magnet  
 Power: 100 Watt Peak  
 Sensitivity: 88 dB



### TECHNICAL SPECIFICATIONS

Frequency Response	65Hz - 18KHz
Power	100W (Max) 50W (Nominal)
Impedance	4 Ohm
Sensitivity	88 dB SPL
DC Resistance	3.3 Ohm
Resonance Frequency (Fs)	71.2 Hz (wf)
Mech. Q Factor (Qms)	4.95 (wf)
Electrical Q Factor (Qes)	1.97 (wf)
Total Q Factor (Qts)	1.41 (wf)
Moving Mass (Mms)	12.9 g (wf)
Eq. Comp. Air Load (VAS)	10.1 L (wf)

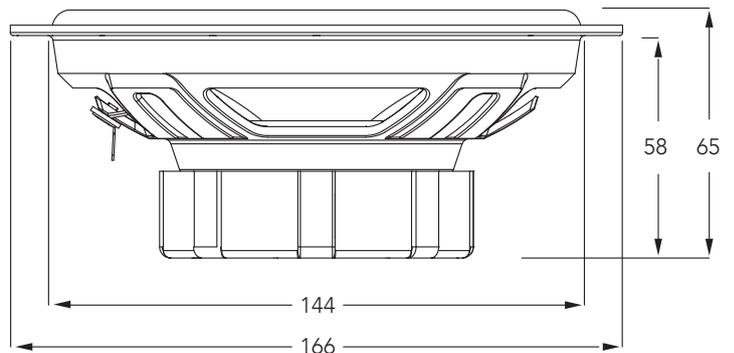

THE HB1.6C COAXIAL SPEAKER, IF USED FOR THE REAR SEATS OF THE CAR, IS THE IDEAL COMPLEMENT TO THE HB1.6K2X OR HB1.6K2 SPEAKER SYSTEMS

