



Monitor Cable

HDMI Male to DVI-D 24+1 Male, Dual Link, Black, 3.3 ft.

Model
322782


Superior connections for quality digital video performance.

MANHATTAN® HDMI to DVI Cables help deliver the brightest, most accurate colors and sharpest detail when connecting high-definition televisions, LCD and plasma displays, digital satellite receivers, DVD players, digital projectors and other DVI- or HDMI-equipped display devices. MANHATTAN HDMI to DVI Cables are engineered and constructed of quality materials to deliver dependable transmissions in digital video applications. Full foil and braided shielding, molded boots with strain relief, protective PVC jackets and gold-plated connections help provide maximum conductivity and clear, crisp signal transmissions with reduced EMI interference and distortion.

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.




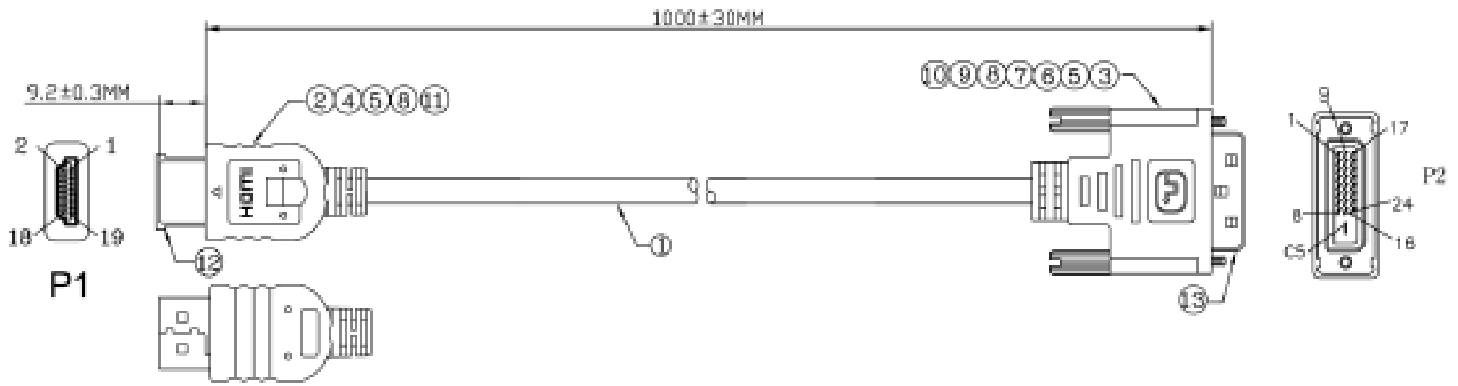

ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 1 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

PIN Assignment

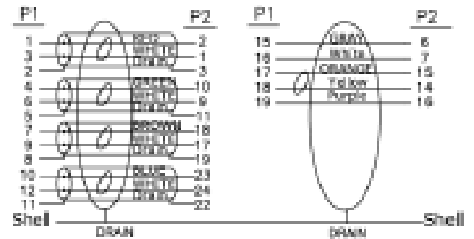

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

NO	ITEM	DESCRIPTION	Q'TY	UNIT
13		DVI TRANSPARENT DUST CAP	1	pcs
12		HDMI TRANSPARENT DUST CAP	1	pcs
11		BLACK SHRINK TUBE Ø 1.5"16MM	1	pcs
10		BLACK SHRINK TUBE Ø 1.6"8MM	4	pcs
9		BLACK SHRINK TUBE Ø 1.0"12MM	4	pcs
8		BLACK SHRINK TUBE Ø 2.0"10MM	8	pcs
7		METAL CAN OD: 7.5MM	1	pcs
6		SCREW: #4-40UNC(2.8"45MM) NICKEL	2	pcs
5		PVC 45P COLOR: BLACK	20	g
4		TRANSPARENT PE	3	g
3		DVI 18+1/P SOLDER TYPE INSULATION: BLACK, SHELL GOLD	1	pcs
2		HDMI 19/P/H SOLDER TYPE INSULATION: BLACK, SHELL GOLD	1	pcs
1		UL20276 (28AWG*1PR+24P)*4C+28AWG*1PR+28AWG*3C+NEB DC: 7.1MM BLACK JACKET(1.1b) L=1.000MM	1	pc

REV.	DESCRIPTION	DATE
1		

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

MANHATTAN	
TITLE: HDMI-DVI (24+1) 30AWG Nickel 01# L=1m	
CUSTOMER :	
CUSTOMER P/N :	322702
SCALE	NONE
UNIT	MM
DATE	06.20/09
DRAWING NO.:	
REV. A	1/2

Features

- HDMI 19-pin male to DVI-D 24+1 male gold plated connections
- Connect between HDMI and DVI-D video source and display
- Fully shielded to reduce EMI and other interference sources
- Supports existing HD (720p, 1080i and 1080p/60) enhanced (480p) and standard (NTSC or PAL) video formats
- Molded PVC boot
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- Meets or exceeds existing HDMI and DVI-D standards
- Compatible with DVI-D dual link devices
 - UL
 - ISO
 - RU
 - CE

CONTACTS

- (1) HDMI 19-pin male
- (1) DVI-D 24+1-pin male
- Molded PVC boot

- Shielded
- 28 AWG connectors

CABLE

- Shielded
- Length: 1 m (3.3 ft)
- Current rating: 0.5 A DC
- Withstanding voltage: 300 V DC
- Insulation resistance: 10 MOhms
- Conductive resistance: 1 Ohm
- Thermal plastic casing

PACKAGE CONTENTS

- Monitor Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

