

ML-65R (stereo)

SPECIFICATIONS

Frequency Response

66–20,000 kHz \pm 2 dB

Crossover Frequency

3,000 Hz

Sensitivity

89dB

Impedance

Stereo Mode - Compatible with 8 ohms

Mono Mode - Compatible with 4 ohms

Low-Frequency Extension*

44 Hz (DIN)

High-Frequency Drivers

Two 1" (2.5cm) titanium domes

Low-Frequency Driver

6-1/2" (16.5cm) mineral-filled polypropylene cone with dual voice coil.

Inputs

Two pair pre-installed wires

Suitable Amplifier Range

Stereo Mode - 15–100 Watts

Mono Mode - 15–55 Watts

Maximum Power Handling**

Stereo Mode - 70 Watts

Mono Mode - 35 Watts

Weight

12.1 lbs. each (5.5 kg)

Size (H x W x D)

12-3/16" x 11-1/8" x 10-5/8"


(31 x 28.2 x 27cm)

*DIN 45 500. Indicates -3 dB in a typical listening room.

**With typical program source, provided the amplifier clips no more than 10% of the time.


Specifications are subject to change without notice.

Color:  Grey Stone

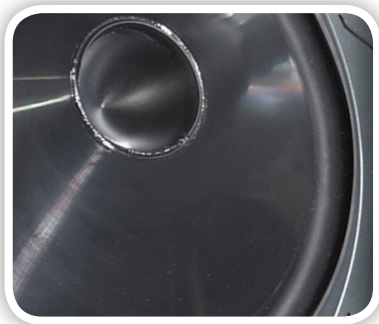

Affordable High-Performance Solutions

Installer Series is our affordable high-performance lineup, featuring custom installation solutions for in-wall, in-ceiling, and outdoor applications.



Titanium dome tweeters and mineral-filled polypropylene drivers ensure great performance, while fully sealed, mineral-filled reinforced enclosures with faux-stone finish provide protection from harsh weather elements that will blend into the surrounding landscape. All models have water & UV-resistant stainless steel grilles for superior toughness.