

Introduction and Features

The SR-TAC16HX is a complete radio replacement kit for the installation of the Stinger HEIGH10® modular radio in Toyota Tacoma trucks equipped with either 6" or 7" factory display radios. All modules, cables and adapters are included to retain important features of the factory system, including: steering wheel-mounted radio controls, factory amplifier, factory reverse camera, factory USB port and AM/FM reception. Plug & Play wiring harnesses allow for quick and easy installation without the need to cut or splice any wiring. The display mounting panel allows mounting the 10 inch display without modifying/cutting any part of the vehicle's sub-dash.

Important Notes

We recommend reading this manual thoroughly to familiarize yourself with the entire process prior to beginning the installation.

1. Adjustment of the vehicle settings through the original radio's vehicle settings menu will be disabled after installation of the new radio. It is advised to make sure all settings are as you desire prior to removal of the original radio.
2. The RP4.2-TY11 does not retain Rear Seat Entertainment.
3. To retain SiriusXM Radio, a SXV300 Tuner is required and sold separately.
4. After installation, if you do not initially hear any audio, you may need to cycle the ignition again to initialize the factory amplifier.
5. Speaker fading on factory amplified systems is only supported with the "amplified output" connection of the RP4.2-TY11.
6. When using real time fade, if the fader setting is biased more to the front or rear, as the radio turns on the sound may begin at the default setting and then quickly transition to your custom setting.
7. Radio features such as High Pass Filters (crossovers) will interfere with proper fader function. In order for the RP4.2-TY11's fader function to work, the audio from the radio's output must match so it can compare the front and rear audio levels and determine the proper fader setting for the factory amplifier.
8. If the truck is equipped with a factory 360° camera system, changing camera views using the touch screen will no longer be available. Camera views can be changed using the steering wheel controls only.

Recommended Tools

10mm Socket

Flush Cutters

Ratchet


Painters Tape

Phillips Screwdriver

Included Components

1. **HEIGH10 Display Mounting Panel**
2. **Side Brackets (TOYK971/974)**
3. **Main Harness 2019-2021 (SR-TAC19H-HAR)**
4. **6" Mounting Plate (TAC16H-6)**
5. **Radio Replacement Interface Module (RP4.2-TY11)**
6. **Satellite Radio Antenna Adapter (SAT-02)**
7. **Main Harness 2016-2018 (SR-TAC16H-HAR)**
8. **7" Mounting Plate (TAC16H-7)**
9. **GPS Antenna Adapter (SR-GPS-TY01)**
10. **AM/FM Antenna Adapter (SR-BAA44)**
11. **Differential Video Adapter (RPA-VA1)**
12. **USB Adapter (USBC-TY1)**
13. **USB Adapter (USBC-TY3)**
14. **Main Harness Adapter (SR-SRK-ADAPT-UN1810)**

NOTE: Along with the SR-TAC16HX components, additional hardware and wire harnesses from the HEIGH10 (UN1810) kit will also be used in the installation. Refer to the UN1810 Installation Guide for harness and hardware descriptions.

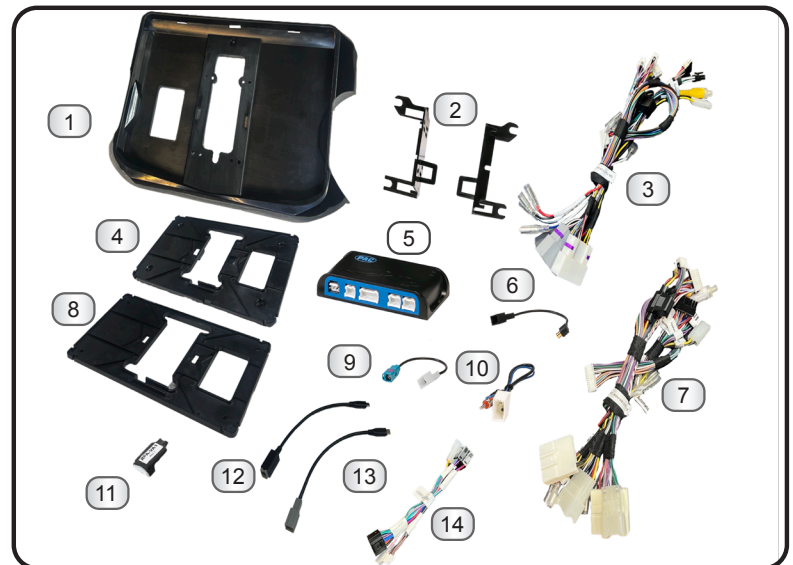

Included double-sided tape, zip ties and M4 x 12 Zinc Screws (6x) not shown.

SR-TAC16HX



Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

Wiring Overview

SR-TAC19H-HAR
VEHICLE CONNECTORS



SR-TAC16H-HAR
VEHICLE CONNECTORS

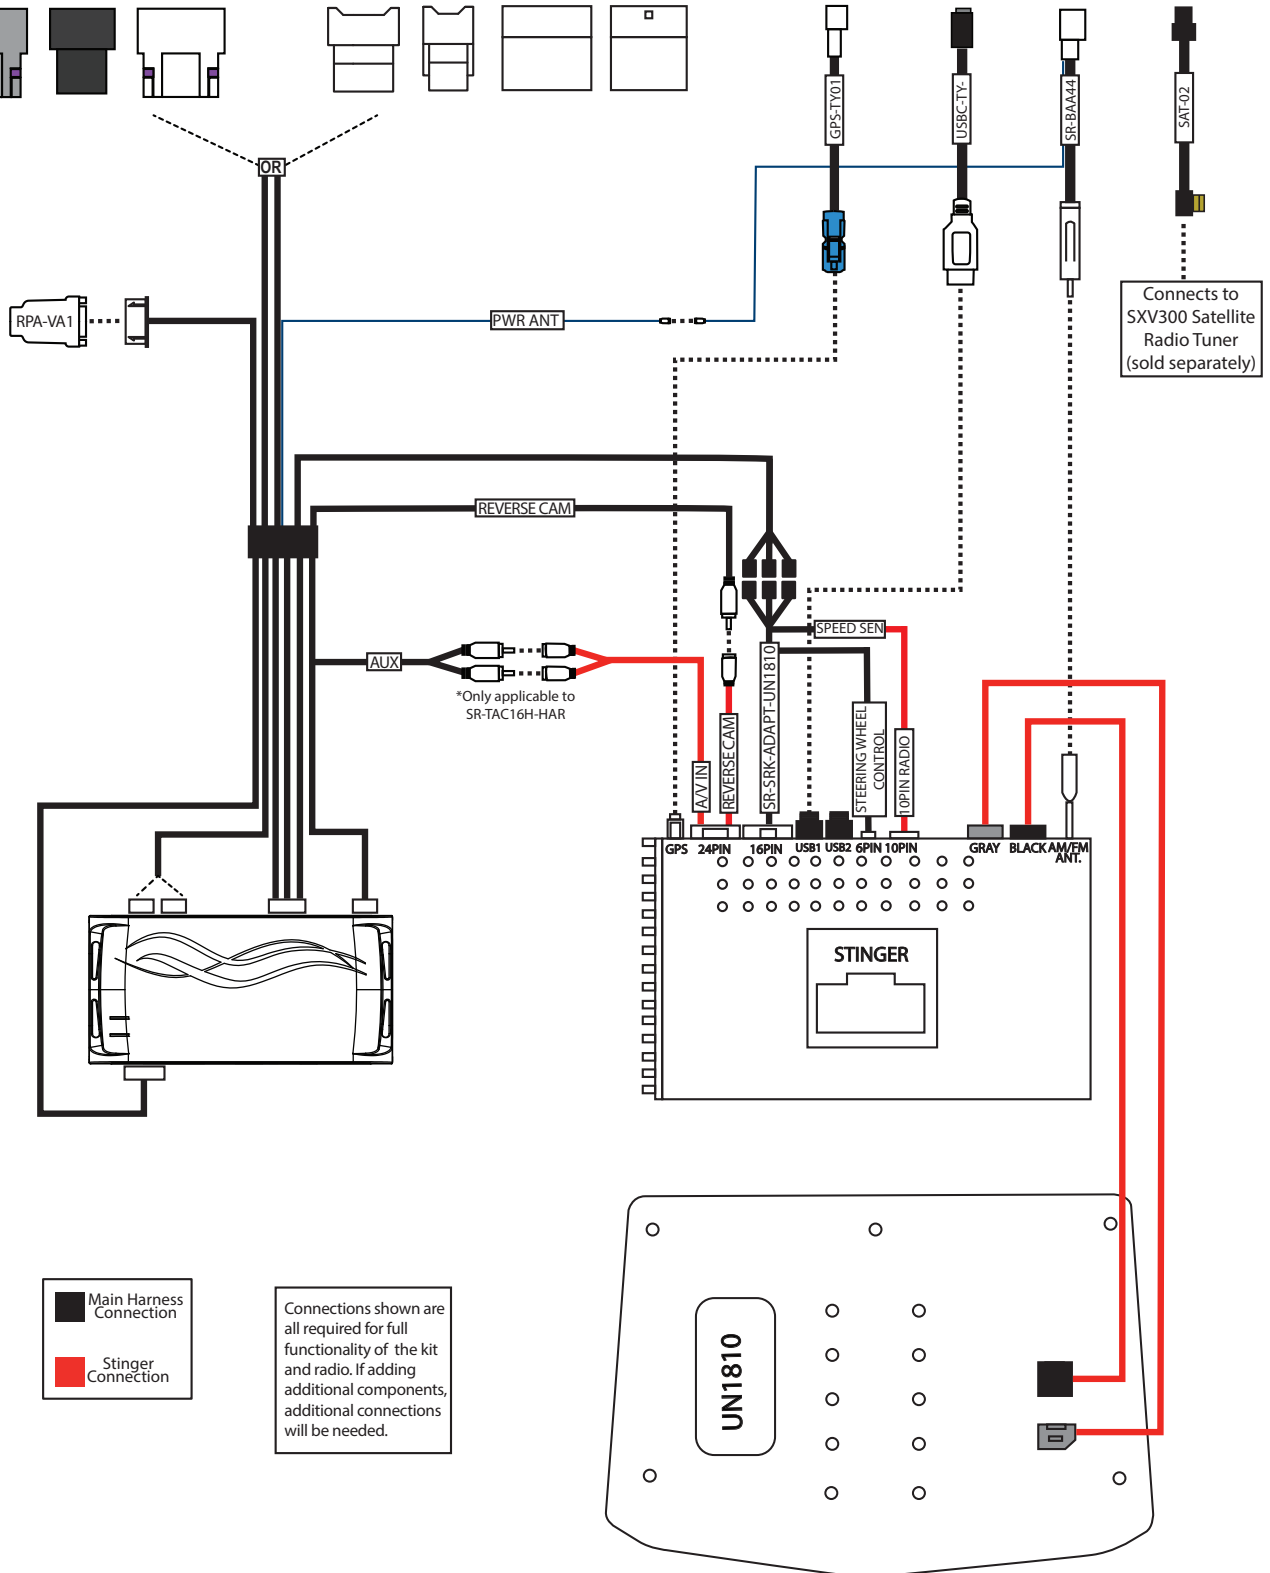

 Main Harness Connection
 Stinger Connection

Connections shown are all required for full functionality of the kit and radio. If adding additional components, additional connections will be needed.



SR-TAC16HX


Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

This installation manual will cover the necessary order of procedures to complete the installation efficiently and to avoid redoing any steps. The order will be as follows; Disassembly, In-Vehicle Harness Connections, Display Mounting Panel Preparation, Radio Module Preparation, Interface and Main Harness Connections, In-Vehicle Connections and Radio Unit Installation.

The installation steps shown are all required for full functionality of the radio. If adding additional components; cameras, amplifiers, satellite radio, etc., additional steps and harnesses will be needed.

Section 1: Disassembly

Before removing the factory radio, ensure that all vehicle settings that are programmed using the factory radio are set to the desired settings.

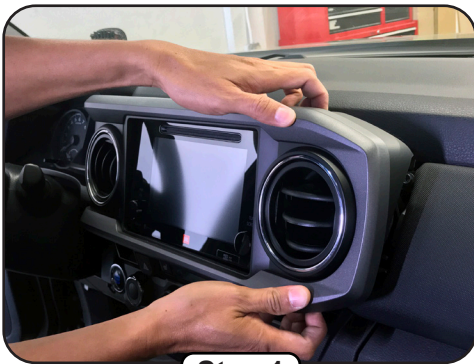

Step 1

Using your hands or soft tool, pull and remove the radio trim and air vent panel.



Step 2


Remove the four 10mm bolts securing the radio. Remove the radio from the sub-dash.



Step 3


Remove all connectors and cables from the back of the radio.

Section 2: In-Vehicle Harness Connections

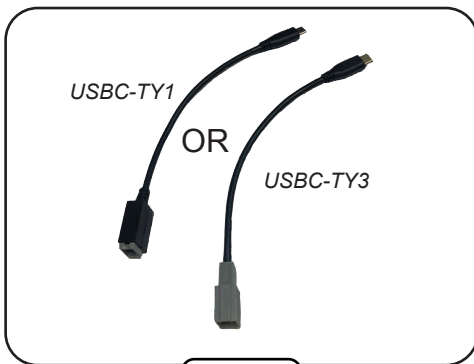


Step 1

From the SR-TAC16HX kit, locate the correct USB adapter:
2016-2018 uses **USBC-TY1**
2019-2021 uses **USBC-TY3**

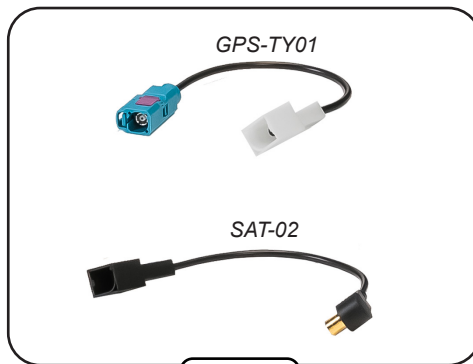

Step 2

From the SR-TAC16HX kit, locate the **GPS Antenna Adapter** and **Satellite Radio Antenna Adapter** if installing a SXM tuner.

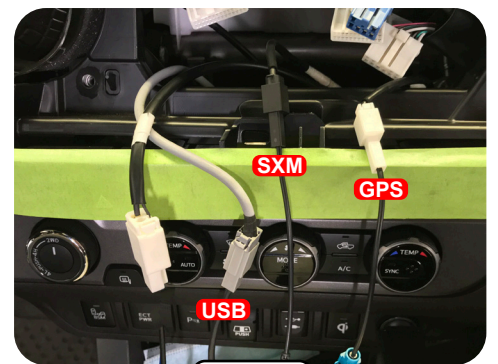

Step 3

Connect the adapters to the matching colored connectors removed from the factory radio.



SR-TAC16HX

Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

Section 3: Display Mounting Panel Preparation




Step 1

Place the **HEIGH10 Touch Panel Display** into the **Display Mounting Panel**. Carefully turn the panel over while holding the display in place.




Step 2

With the **Touch Panel Display** face down on a soft surface, attach the **Display Mounting Panel** using four M4 x 12 screws from the HEIGH10 hardware pack.

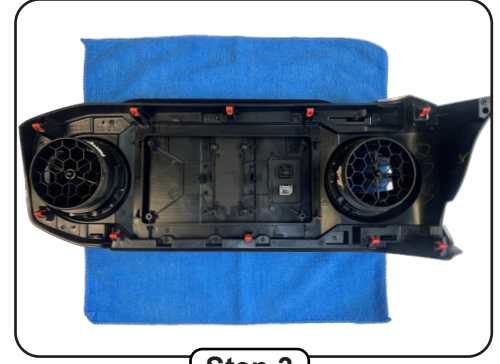


Step 3

Place the factory radio/air vent panel face down on the back of the **Display Mounting Panel** as shown.

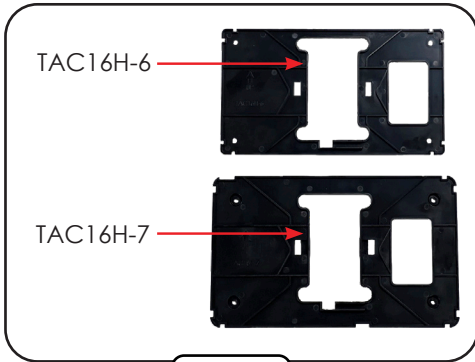


Step 4

From the SR-TAC16HX kit, choose the appropriate **Mounting Plate**. **TAC16H-6** is used when replacing a 6" factory display and **TAC16H-7** is used when replacing a 7" factory display radio.

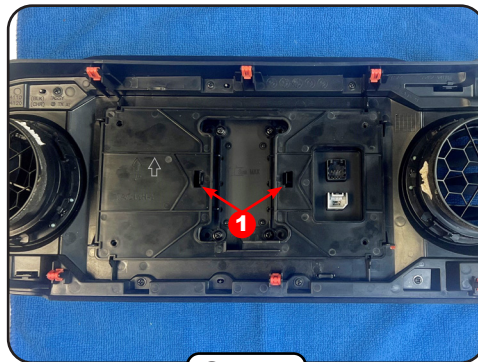

Step 5

With the arrow pointing up, align the **Mounting Plate** to the locking clips (1) and push down until both clips engage. Move the panel side-to-side to ensure the mounting panel is centered.

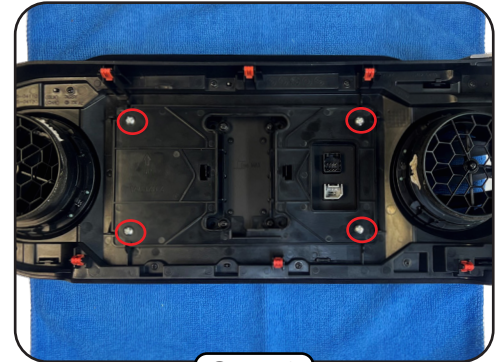

Step 6

Secure the **Mounting Plate** to the **Display Mounting Panel** using four M4 X 12 screws provided in the SR-TAC16HX kit.



SR-TAC16HX

Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

Section 4: Radio Module Preparation

Left Bracket
Top




Right Bracket
Top



Step 1

Locate the **Side Brackets** (TOYK971/974) included in the SR-TAC16HX kit and four M5 X 10 screws from the HEIGH10 hardware.

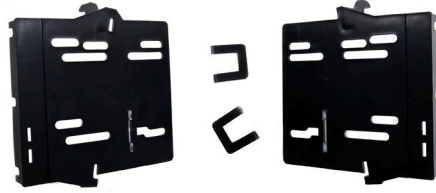


Step 2

Remove the tabs located on the inside of the left and right **Side Brackets**.




Step 3

The **HEIGH10 Radio Module** will be mounted using the lower slots on the **Side Brackets**. The **Radio Module** will be inverted and set back $\frac{3}{4}$ ".

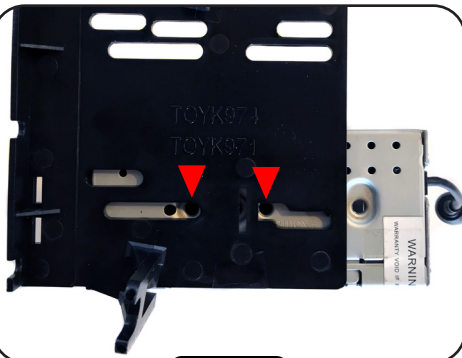


Step 4

Position the right side bracket as shown and align the bracket to the mounting holes indicated.

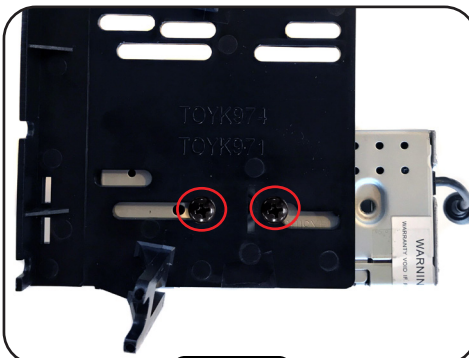

Step 5

Secure the right side bracket using two M5 x 10 screws from the HEIGH10 hardware.

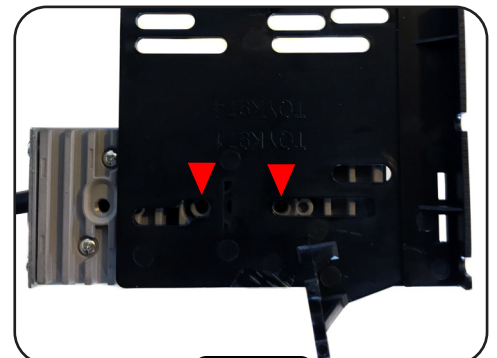


Step 6

Position the left side bracket as shown and align the bracket to the mounting holes indicated.

Step 7


Secure the left side bracket using two M5 x 10 screws from the HEIGH10 hardware.

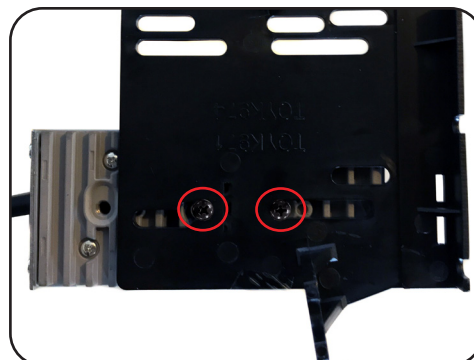

SR-TAC16HX


Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

Section 5: Interface and Main Harness Connections

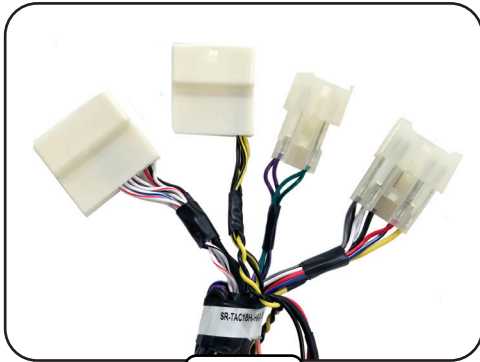


Step 1A

OR

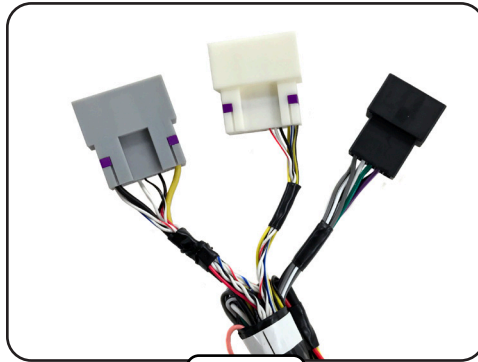

Step 1B

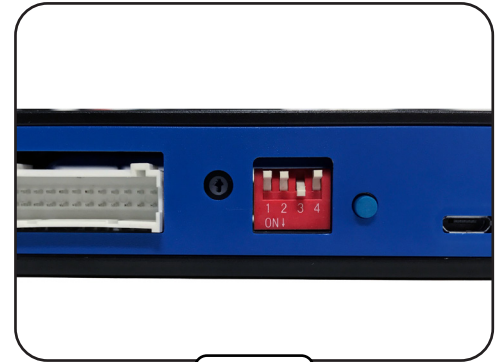


Step 2

For 2016-2018 Tacoma, the **SR-TAC16H-HAR** (4-Plug) Main Harness will be used.

For 2019-2023 Tacoma, the **SR-TAC19H-HAR** (3-Plug) Main Harness will be used.

Set dip switch #3 to the down (ON) position on the side of the **Radio Replacement Interface Module (RP4.2-TY11)**.

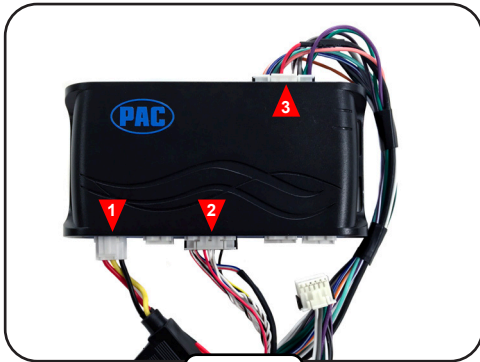


Step 3



Step 4

Plug in the 3-pin (1), 20-pin (2) and the 24-pin (3) plugs on the **Main Harness** to the appropriate ports on the **RP4.2-TY11**.

Referencing the sticker on the back, connect the 12-pin connector (4) to the appropriate port. Amplified if the truck has a factory amplifier, Non-Amplified for base audio.

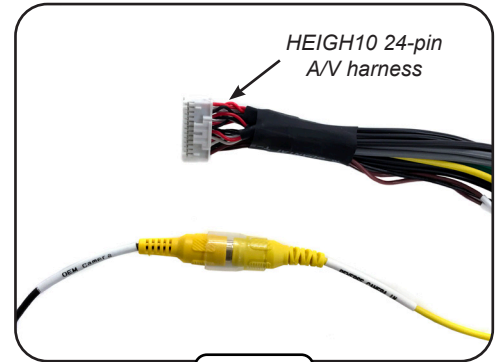


Step 5

Connect the "OEM Camera" RCA on the **Main Harness** to the "Reverse Camera In" RCA on the HEIGH10's **24-pin A/V / Rear Camera Harness (SE-1103)**.

Step 6


For 2016-2018 Tacoma, connect the pair of RCA's labeled "AUX Audio" from the **Main Harness (SR-TAC16H-HAR)** to the "AUX IN" RCA's on the HEIGH10's **24 Pin A/V / Rear Camera Harness**.

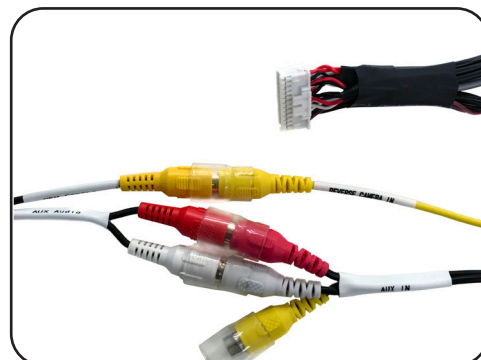

SR-TAC16HX


Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

Section 5: Interface and Main Harness Connections (Continued)

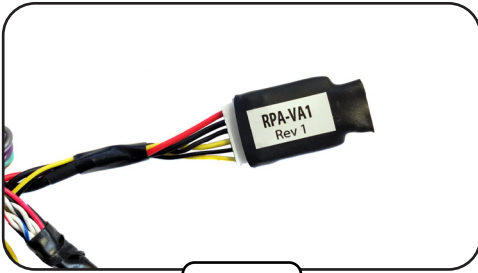


Step 7

From the SR-TAC16HX kit, connect the **Differential Video Adapter (RPA-VA1)** to the 6-pin plug on the **Main Harness**.

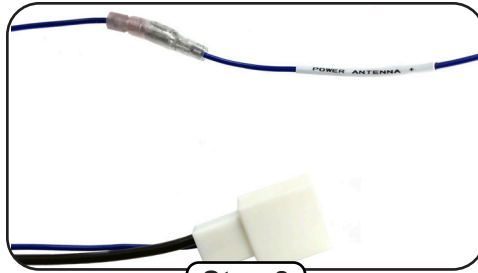


Step 8

Connect the blue wire on the **AM/FM Antenna Adapter (BAA44)** to the blue "POWER ANTENNA +" lead on the **Main Harness**.

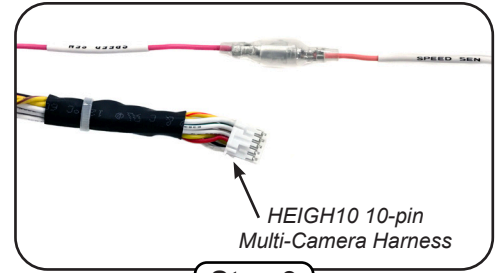


Step 9

Connect the "SPEED SEN" wire on the HEIGH10's **10 Pin Multi Camera Harness** to the "SPEED SEN" wire on the **Main Harness**.

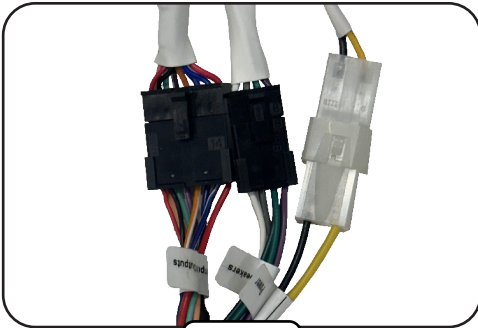


Step 10

Connect the **Radio Harness Adapter (SR-SRK-ADAPT-UN1810)** to the **Main Harness** (from step 1).

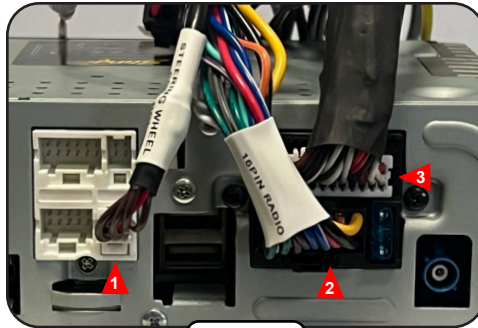


Step 11

From the **Radio Harness Adapter**, plug the "Steering Wheel Control" 6-pin (1) and "16 Pin Radio" (2) connectors into the HEIGH10 Radio Module. Plug in the **24 Pin A/V / Rear Camera Harness** (3).

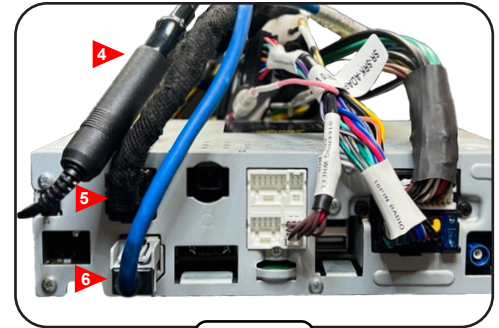

Step 12

Connect the **AM/FM Antenna** (4). From the HEIGH10 harnesses, plug in the **8 Pin Display Power (SE-1100)** (5) and **LVDS Display Video (SE-1101)** (6) cables into the **Radio Module**.

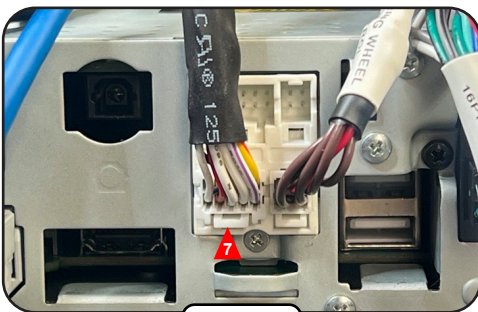


Step 13

Plug in the **10 Pin Multi Camera Harness (SE-1104)** (7).



Step 14

Insert the included USB-C to USB-A adapter into the USB port closest to the edge of the radio. This USB will be used for CarPlay / Android Auto.

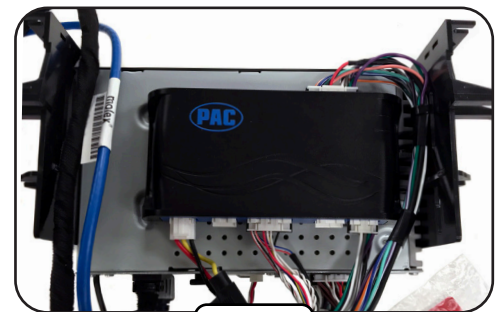

Step 15


Using the supplied two-sided tape, mount the **Radio Replacement Interface Module (RP4.2-TY11)** to the top of the **Radio Module**. Position the interface so that it does not cover the vent holes.



SR-TAC16HX

Stinger HEIGH10® Radio Replacement Kit
for 2016-2023 Toyota Tacoma

Section 6: In-Vehicle Connections and Radio Unit Installation

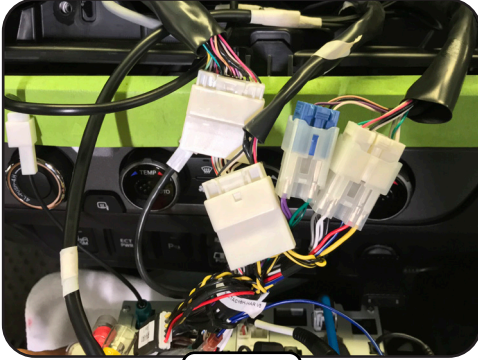


Step 1

Connect the three or four vehicle side connectors on the **Main Harness** to the vehicle's radio plugs. (**SR-TAC16H-HAR** is shown)



Step 2


Connect the **AM/FM Antenna Adapter (SR-BAA44)** to the vehicle's antenna connector.

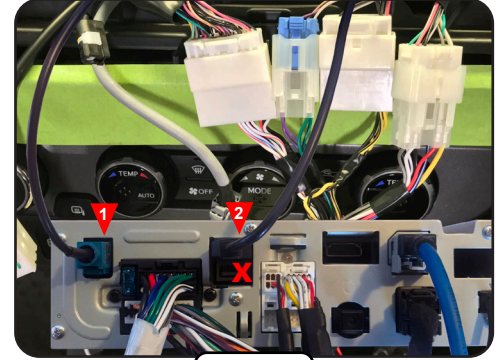

Step 3


Connect the **GPS Antenna (1)**. Connect the **USB Adapter (2)** to the Type-C to Type-A adapter from Section 5, Step 14. Note: The USB cable must be plugged into the USB port closest to edge of the radio chassis to use Apple CarPlay and Android Auto.

These are the connections for the basic installation. If adding additional components such as a second USB, SXM tuner or additional cameras, those connections should be made at this point, before mounting the radio module.

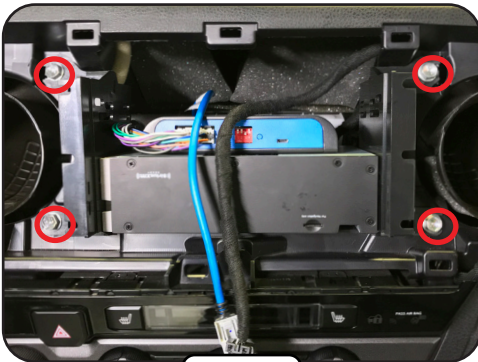

Step 4

With the two display cables routed over the top of the radio assembly, slide the assembly into position and re-install the four factory 10mm bolts.

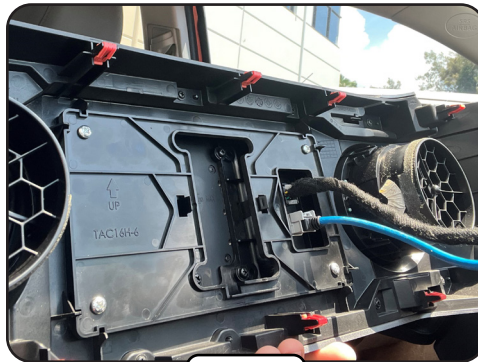

Step 5

Plug in the **8 Pin Display Power Harness** and **LVDS Display Video Cable** into the back of the **Touch Panel Display**.



Step 6

Re-install the factory radio/air vent panel by aligning the retaining clips and pushing until all the clips engage.



Testing and Verification

1. Turn on the radio and check volume, balance and fade. If you do not hear any audio you may need to cycle the ignition to initialize the factory amplifier. If there is still no audio, reset the interface according to the procedure in the next section.
2. For JBL systems, if the overall volume is too low, use the gain adjustment on the side of the RP4.2 interface to set it to the desired level. The best way to do this is to turn the volume on the radio to 3/4 volume, then turn the gain on the RP4.2 until some distortion is heard, then back it down a little.
3. Verify that all SWC are functioning properly. If any of the SWC are not functioning properly you may need to reset the interface.
4. Verify AM/FM Reception, Bluetooth, USB, Apple Carplay, Android Auto and Camera(s) are functioning correctly.

Restoring Factory Settings

You can restore the RP4.2-TY11 interface to factory default settings by pressing and holding the programming button on the side of the module until the status LED starts blinking red. Once the LED starts blinking red, release the button. You must release the button while the LED is blinking red in order to perform the reset. Please note, the LED will go through two stages before it starts blinking red. First it will blink green, then amber, then red.

This reset will restore the following settings to their factory defaults:

- SWC Mapping
- Parking Brake Output Settings
- Factory Amplifier Settings
- Real Time Fade will be reset to on

Firmware Updates (Stinger HEIGH10)


To update the Stinger radio firmware, refer to the HEIGH10 product page at:

www.stingersolutions.com/pages/un1810-heigh10-information

RadioPRO App

Use of the RadioPRO App allows you to do the following:

- Configure User Interface Options such as:
 - Aftermarket radio Parking Brake Sequencing
 - Factory amplifier settings (Bass, Mid, Treble, Gain, Fader and Balance)
 - Real Time Fading
- Update Product Firmware
- Read Firmware/Hardware Versions
- Access Product User Manuals

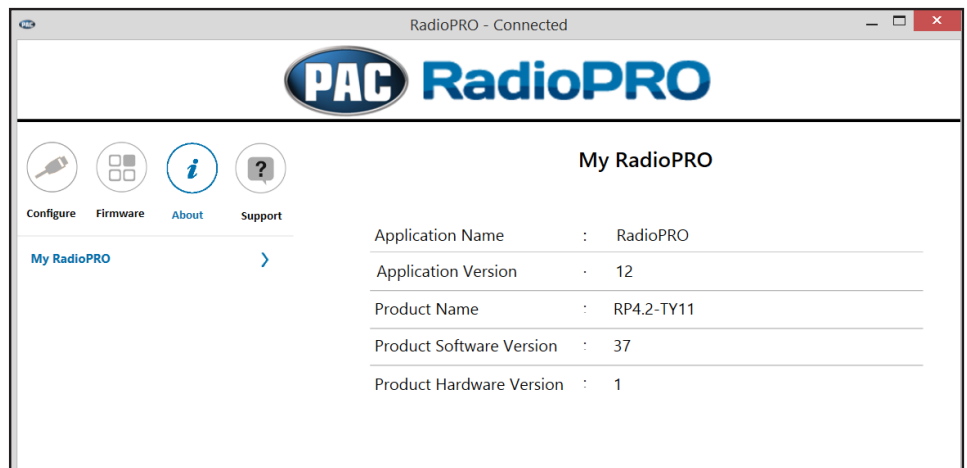

PLEASE NOTE:

The interface must be connected to the vehicle when using the following features of the Radio PRO App:

- Factory Amplifier Settings

The interface does not need to be connected to the vehicle when using the following features of the Radio PRO App:

- Firmware Updates
- Reading firmware/hardware versions



RadioPRO App (cont.)


Infotainment/Factory Amplifier Settings

The RadioPRO app will also allow you to adjust the settings of the factory amplifier. You can adjust Amp Gain, Fader, Balance, Bass, Mid and Treble and real time fade. When real time fade is enabled in amplified systems, it will allow fading to be controlled directly from the aftermarket radio. Restoring factory settings on the module will default all values back to middle.

Firmware Updates

The RadioPRO app will also allow you to update the interface with new firmware as it becomes available. Please visit www.pac-audio.com or contact our tech support department to see if there is a firmware update for your interface.

In order to update the interface all DIP switches must be set to the down position. Connect the interface to your PC and select "Update Firmware". Now select "Select File". Finally, browse to the place where you saved the file and select it. This will begin the updating process. Once finished, disconnect the interface from the PC and set the DIP switches back according to the radio you have installed.

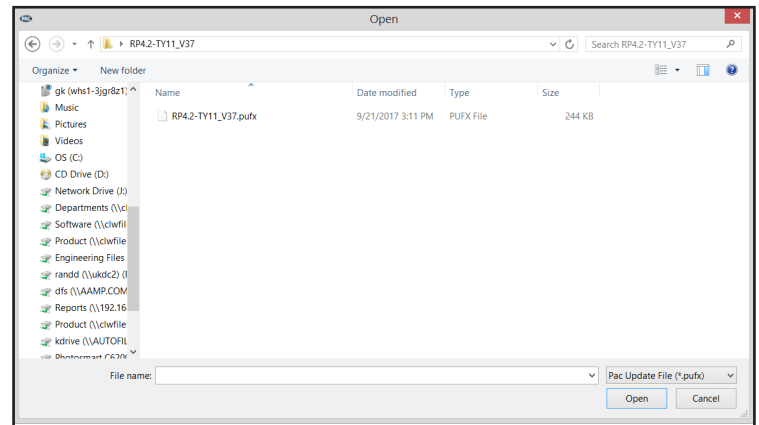

Technical Support

Email: support@PAC-audio.com

Phone: 727-592-5991

Chat: PAC-Audio.com

