



# SONANCE


## DSP AMPLIFIER

### DSP 2-750 MKIII

Sonance DSP amplifiers are the finishing touch to any audio system with Sonance digital signal processing that optimizes speaker performance and helps to correct for a room's unique acoustic properties. This, along with their outstanding power and performance, ensures audiophile clarity in every room.

## FEATURES AND BENEFITS

- High resolution 24 bit/96 kHz processing DAC capable of 4608 KBPS audio playback.
- IP and IR controllable via SONARC™ for the ultimate in installation flexibility.
- Powerful, audiophile grade Class-D amplification, rated and certified at 8 and 4 ohms and stable to 2 ohms.
- 750 Watts RMS per Channel @ 70 Volts
- Compact form factor allows for space savings in the equipment rack with ample power to the speakers.
- Class-D design is 93% efficient for maximum power output with minimal power usage. Meets EU power saving standards.
- Terminal blocks will accept up to 12AWG speaker cable for longer runs and higher performance.
- Full array of input/output connectivity for maximum installation flexibility: Line input/loop outputs; IP, IR, audio and voltage triggers; Ethernet jack for network connectivity.
- Bridgeable channels for applications when even more power is required.
- Certified to worldwide safety standards. (TUV to UL standards, CE, RCM, C-Tick, RoHS, WEEE). Meets FCC standards.
- Rack ears and removable feet included.
- Digital Input Module compatible.

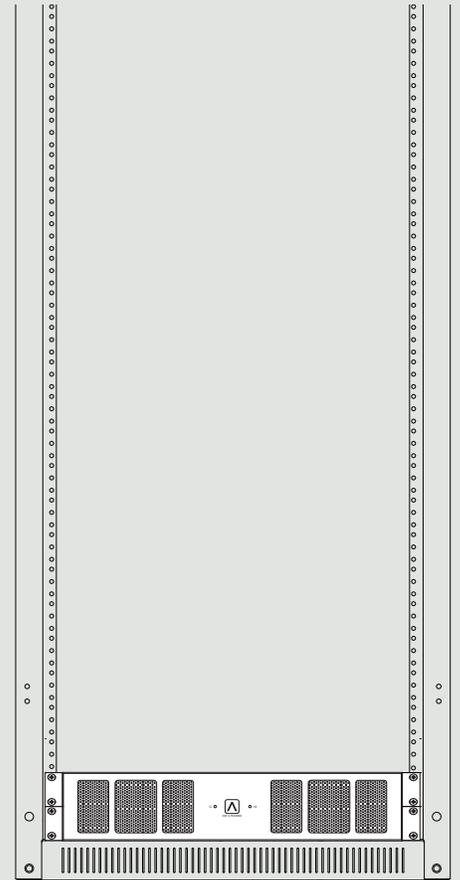

DSP 2-750 MKIII shown with  
Optional Mounting Rack

## DSP AMPLIFIER



### DSP 2-750 MKIII

SKU 93540 (North America)

SKU 93541 (International)