

APCR35L

Contactless proximity reader



Features

- Up to 15 feet of read range
- Contactless smartcard reader solution with mobile access support
- Digital Radio Frequency Identification (RFID) platform
- Supports both sector and card serial number (CSN) reads
- Offers the option of mobile access credentials loaded on Bluetooth Low Energy (BLE) enabled smartphones or contactless proximity module
- IP67 compliant, weather resistant
- Tamper resistant
- Lifetime warranty




Technical Specification

Model	Long-Range Mobile-Ready Contactless Proximity Reader
Technology	Contactless Proximity and Bluetooth Low Energy (BLE)
Frequency	125 kHz (proximity) and 2.4 GHz (BLE)
Mounting	A single reader for metal door and window frames, single-gang wall boxes, and flat surfaces
Dimensions	Mullion: 1.7" W x 4.7" H x 1.2" D (43 mm x 119 mm x 30 mm) Switch Plate: 3" W x 5.1" H x 1.2" D (76 mm x 130 mm x 30 mm)
Certifications	FCC, ICC, CE, UL Standard 294
IP Code	IP67
Voltage	+8 - 14 VDC
Current Draw	60 mA typical, 90 mA peak @ 12 VDC
Read Range	Physical Proximity Credentials: Up to 4 inches (102 mm) Mobile Credentials: Up to 15 feet (4.6 m)
Cabling	24 AWG minimum, multiconductor stranded with an overall foil shield
Interface	Wiegand 26-bit
Operating Temperature	-31° F to 150° F (-35° C to +66° C)
Audio Tone	Beeper included standard
Indoor & Outdoor Installation	Electronics sealed in weather- and tamper-resistant epoxy potting
Warranty	Lifetime warranty
LED	Five-state standard (blue, red, green, amber, and off)
Technologies Supported	Pyramid + certain HID® 125-kHz Proximity protocols + certain AWID® 125-kHz Proximity protocols Conekt Mobile Access Credentials

*Products are in compliance with NDAA Section 889 Part B Guidelines

Optional Accessory

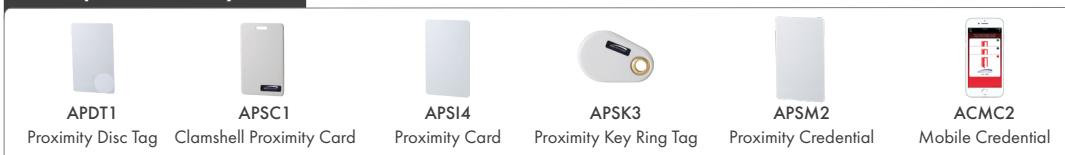

NDAA
COMPLIANT

Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 1/10/22