

HD 1080p LED Monitor

M19LED 19" LED monitor

M215LED 21.5" LED monitor


Features

- Flat-panel LED - backlit LCD
- HDMI, VGA (D-Sub 15 pins) and BNC video inputs
- 1920(H) x 1080(V) HD 1080p resolution
- Built-in speakers
- Convenient front controls for screen programming
- Input signal detection provides easy connection
- 290cd/m2 brightness
- 16:9 display ratio
- 500:1 contrast ratio
- Displays up to 16.7 million colors
- Regulated 12VDC 5.0 amp (UL & CSA listed power supply included)
- VESA compatible
- 1 year warranty




ECO-FRIENDLY - LOW ENERGY CONSUMPTION
GREENER THAN LCDs

| Specifications | M19LED | M215LED |
|-----------------------|--|-------------------------------------|
| Composite Output | BNC 1 | |
| Composite Input | BNC 1 | |
| Single Connector | VGA x 1, RCA x 2, PC Audio x 1, HDMI x 1 | |
| Speaker | 1W+1W | |
| Display Mode | VGA / BNC / PC / HDMI | |
| AC Power | AC 100 - 240V 50/60Hz | |
| Operating Temperature | 14° F – 122° F | |
| Storage Temperature | -4° F – 140° F | |
| Power Consumption | 20W | 25W |
| OSD Control | HDMI, VGA, Audio, PIP, System | |
| OSD Languages | English | |
| Auto Adjustment | Yes | |
| De-interlace | Yes | |
| Wall Mount | Optional | |
| Accessories | Remote, Adaptor, Power Cord, Manual, VGA cable, PC Audio Cable | |
| Safety | FCC, CE, RoHS | |
| Tilt | 10° – 15° | |
| Humidity | 20% – 85% | |
| Monitor Scan | Microprocessor controlled | |
| Pixel Pitch | 0.24825 (H) x 0.24825 (V) | |
| Pixel Format | 1920 x 1080 | |
| Response Time | 5ms | |
| Color Depth | 16.7 million colors | |
| Viewing Angle | Left 85° / Right 85° / Up 80° / Down 80° CR > 10 | |
| Display Area | 16.13" (H) x 9.07" (V) | 18.41" (H) x 10.56" (W) |
| Dimensions | 17.44" (W) x 13.70" (H) x 2.17" (D) | 20.31" (W) x 16.20" (H) x 2.38" (D) |
| Weight | 6.17 lbs. | 7.94 lbs. |

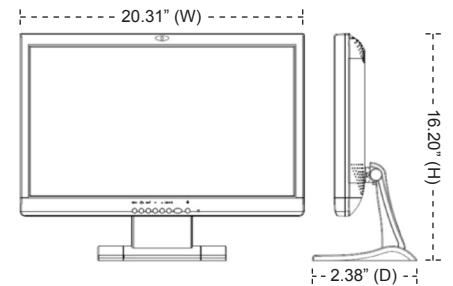

M215LED

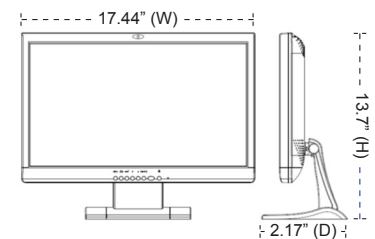

M19LED

Optional Accessory



LCDVLW2
10" Extension Arm