


3MP Bullet IP Camera with Junction Box

O3VFBM 2.7-12mm motorized lens, dark gray housing

Features

- Supports up to 3MP
- Motorized varifocal lens with auto focus
- Built-in standard PoE (IEEE 802.3af)
- Adaptive IR LEDs reduce IR saturation
- IR Range: 190' (depending on scene reflection)
- True Day/Night operation (IR cut filter)
- Micro SD card slot for edge recording (card not included)
- IP67 compliant, weather resistant
- Junction box included
- UL listed
- Conformant with ONVIF Profile S
- 5 year warranty

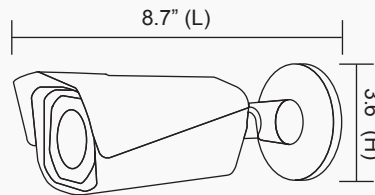

Included Junction Box (O2VLJBB)

Camera Specifications

Image Sensor	Progressive scan 1/3" CMOS, 3MP
Maximum Resolution	2048 x 1536
Minimum Illumination	F1.4, 0.1 lux color; 0 lux (IR LED on)
IR Range	190' (depending on scene reflection)
White Balance	Auto / Manual
Compensation	DWDR/BLC/HLC
Day/Night	IR cut filter
Exposure Control	Digital slow shutter
Electronic Shutter Speed	1/3 - 1/100000 sec
DNR	3D

Video Specifications

Supported Resolutions	2048x1536 @ 20fps; 1920 x 1080 / 1280x720 @ 30fps
Compression	H.264, MJPEG
Bitrate Control	VBR, CBR
Multiple Streaming	3 streams

Audio Specifications

Mono Input	N/A
Mono Output	N/A

External Terminal Specifications

Ethernet	10/100 Mbps
Storage	Micro SD slot (128GB max)
Power	DC jack

Network Specifications

Protocols	IPv4, IPv6, TCP, UDP, RTCP, RTP, RTSP, HTTP, HTTPS, SMTP, SNMP, UPnP, FTP, DHCP, Bonjour, QoS, 802.1x
DDNS support	Speco DDNS (free of charge)

Network Specifications (continued)

Security	User ID & Password protection, IP address filtering
User Access	20 simultaneous users (performance may vary depending on resolution and number of connections)

System Specifications

PoE	Standard (IEEE 802.3af)
Analytics	Motion detection, face detection
Alarm Triggers	Analytics, network loss
Alarm Events	FTP video/image file upload, email image upload, micro SD card recording, relay out
Video Buffer	Configurable pre-record & post-record
Image Settings	Privacy mask

Client Specifications

Web Browser Support	Windows (Internet Explorer 11)
PC Application	SecureGuard®
Mobile	SecureGuard® Mobile (iPhone® and Android™)

Operating & Unit Specifications

Power	PoE, 12VDC (power supply not included)
Power Consumption	8.5W max
Operating Temperature	-22°F -140°F
Operating Humidity	0% - 95% RH
Unit Dimensions	8.7" (L) x 3.8" (W) x 3.6" (H)
Unit Weight	1.5 lbs.
Certifications	FCC, RoHS, UL

Optional Accessories



O3PMT
Pole Mount
(use with Junction Box)



POEINJ
12.95W
PoE Injector



PSW5
12VDC
Power Supply