


Gigabit Network Switch

P4S5V 5-Port Gigabit Network Switch (4 ports PoE, 1 port uplink)



Features

- VLAN Mode:
 - When the VLAN mode is selected, each PoE port is isolated and independently connects with cameras, computers or other switches, while the uplink port connects with a router.
 - The VLAN function helps avoid broadcast storms and ARP spoofing.
- Port 1 supports up to 40W and all ports support 802.3at/802.3af.
- Ports 3 and 4 can be extended up to 800' (250M) @10Mbps

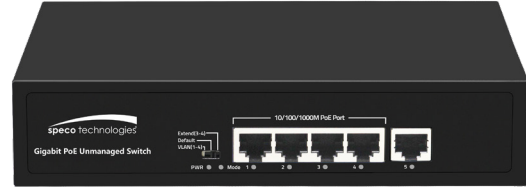

Specifications

Downlink Ports	4 x 10/100/1000 Base-TX (PoE)
Uplink Ports	1 x 10/100/1000 Base-TX
Network Standards	IEEE802.3 (10Base-T)/IEEE802.3u (100Base-TX)/IEEE802.3ab (1000Base-TX)/IEEE802.3x (Flow control)
PoE Standards	IEEE 802.3af/at
Switch Capacity	12Gbps
Packet Forwarding Rate	8.9Mpps
Exchange Type	Storage & Forwarding
MAC Address List	2K
PoE Power Supply	Default 1/2(+), 3/6(-)
PoE Output	Port 1 ≤ 40W, Port 2-4 ≤ 30W, Total for all ports ≤ 65W
Voltage Input	Input Voltage: AC 100-240V; Power Supply: 52V 1.25A
Power Consumption	No Load < 5W; Full Load < 60W
Operation Temperature	14 to 122°F (-10 to 50°C)
Storage Temperature	-40 to 158°F (-40 to 70°C)
Operation Humidity	5% - 90% (Non-condensing)
Dimensions	(L x W x H): 7.9" x 4.6" x 1.7" (200mm x 118mm x 44mm)
Material	Metal
Weight	1.4 Lbs. (0.63kg)