

# IP In-Ceiling Speakers

## SPIPG66T

6.5" IP Modern Grille In-Ceiling Speaker

## SPIPG86T

8" IP Modern Grille In-Ceiling Speaker

### Features

- Works with Speco Audio Manager Software
- Compatible with SecureGuard® VMS via ONVIF
- Supports pre-recorded messages, schedules, and alarm trigger
- PoE or 12/24VDC
- Two-way audio support with mic input
- Dog-ear mounting clamps for secure installation



### Network Specifications


Security	Password protection, IP address filtering, digest authentication, user access log, firewall
Network Protocol	SIP, ONVIF, HTTP, IPv4, DHCP, RTSP, RTP, RTCP, TCP, UDP, ARP, FTP, TFTP, NFS, NTP
Network Interface	10/100 Base-TX, RJ45
VoIP	Support for SIP protocol for integration with VoIP systems, integrated with SIP/PBX. 2 SIP Accounts, SIP Direct IP Call, RTP Multicast Codec: OPUS, MP3, G.722, PCMU, PCMA

### Amplifier


Amplifier Description	Built-in 15W Amplifier
-----------------------	------------------------

Specifications	SPIPG66T	SPIPG86T
RMS Power	10W	10W
Max. Power	15W	15W
Maximum SPL (Pax/1M)	90dB	90dB
Driver Impedance	8 Ohms	8 Ohms
Frequency Response Range	85Hz - 18kHz	120Hz - 20kHz
Dispersion @ 1000Hz	120° Conical	120° Conical
Driver	6.5" paper cone woofer, 0.8" dual cone tweeter	8" paper cone woofer, 0.8" dual cone tweeter
Speaker Dimensions	9" (Dia.) x 3" (D)	10.75" (Dia.) x 3.5" (D)
Mounting Dimensions	7.625" (Dia.)	9.5" (Dia.)
Minimum Mounting Depth	2.4"	2.8"
Weight	1.9 lbs.	2.2 lbs.
Material	Baffle: High impact polystyrene Grille: Steel	Baffle: High impact polystyrene Grille: Steel
Color	Off-White	Off-White

### Diagrams

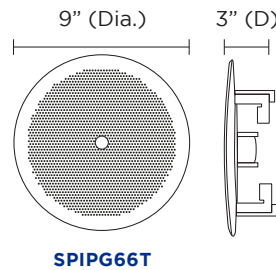


SPIPG66T

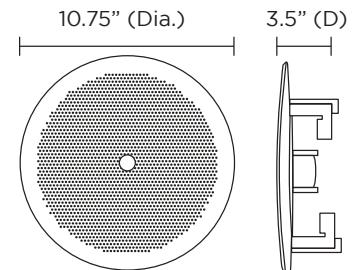


SPIPG86T

### Optional Accessories



**BRC6**  
Mounting Bracket  
(sold in pairs)



**BRC8**  
Mounting Bracket  
(sold in pairs)