

IP 30W IP Horn Speaker

SPIPH9AM

IP Speaker

Features

- Works with Speco Audio Manager Software
- Compatible with SecureGuard® VMS via ONVIF
- Supports pre-recorded messages, schedules, and alarm trigger
- IP67 waterproof design is ideal for outdoor installations
- PoE or 12/24VDC



Audio

Codec OPUS 48kHz, MP3 44.1kHz, G.722 ADPCM 16kHz, G.711 PCMU 8kHz, G.711 PCMA 8kHz

Speaker

Max Sound Pressure Level 120dB
 Frequency Response 350Hz-8kHz
 Frequency Range 500-2kHz 3 10dB
 400-12kHz 3 20dB
 Harmonic Distortion 0.1@1kHz
 Signal to Noise Ratio 91dB

Network

Security Password protection, IP address filtering, digest authentication, user access log, firewall

Network Protocol SIP, ONVIF, HTTP, IPv4, DHCP, RTSP, RTP, RTCP, TCP, UDP, ARP, FTP, TFTP, NFS, NTP

Network Interface 10/100 Base-TX, RJ45

VoIP Support for SIP protocol for integration with VoIP systems, integrated with SIP/PBX.
 2 SIP Accounts, SIP Direct IP Call, RTP Multicast
 Codec: OPUS, MP3, G.722, PCMU, PCMA

Amplifier

Amplifier Description Class D
 Built-in 30W Amplifier


Audio Specification

Inputs (2) Alarm Inputs

General

Operating Temperature -22°F - 140°F
 Operating Humidity 5% - 85%
 Material ABS (IP67 waterproof)
 Rate Power 30W
 Power Supply PoE or 12-24V
 Dimensions 11.2" (W) x 8.07" (H) x 11.5" (D)
 Net Weight 4.40 lbs
 Package Includes IP Horn Speaker
 User Manual
 Color White

External Connectors

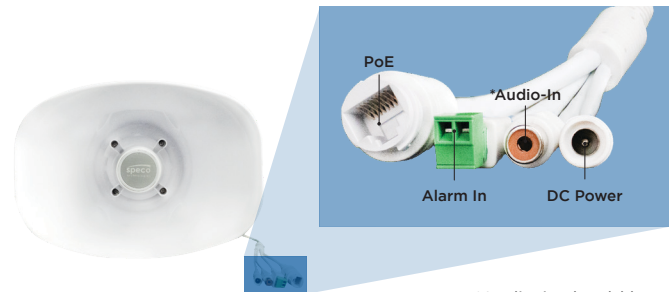

*Audio-in should be a passive audio input

