




Industrial Gigabit UPoE Splitter

TI-SG104 (v1.0R)


- Power a non-PoE device up to 100m (328 ft.) away from PSE
- Splits a gigabit PoE signal into separate power and data sources
- A single Ultra PoE source can power up to two devices
- Adjustable voltage output supports 12V, 16V, 24V or 48V devices
- For best performance pair with UPoE switches or injectors
- Save on installation and equipment cost
- Full Duplex Gigabit speeds
- IEEE 802.3bt compatible

TRENDnet's Industrial Gigabit UPoE Splitter, model TI-SG104, networks a non-PoE device by using a Gigabit Ultra PoE connection and splitting it into separate power and gigabit data sources. The industrial gigabit UPoE splitter can power up to two devices from a single UPoE source. A convenient DIP switch adjusts output power to 12V, 16V, 24V, or 48V in order to match power requirements for non-PoE devices. The UPoE splitter's dual DC power output provides greater device compatibility.

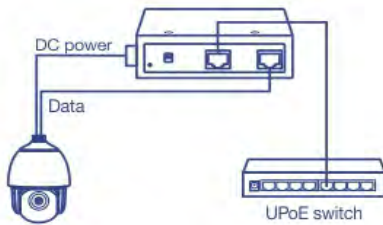


UPoE Powered

No power adapter necessary; the UPoE splitter takes a UPoE network connection, and splits power and data into separate connections to network a non-PoE device with power up to 100m (328ft.).

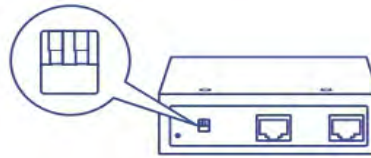

Adjustable Voltage Output


Convenient DIP switch adjusts voltage output to 12V (2.3A), 16V (2.3A), 24V (2.3A) or 48V (1.25A) to match non-PoE device power requirements.

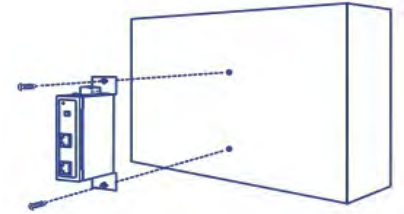

Wall Mountable

The UPoE splitter's wall mountable design accommodates most installation scenarios.

Networking Solution

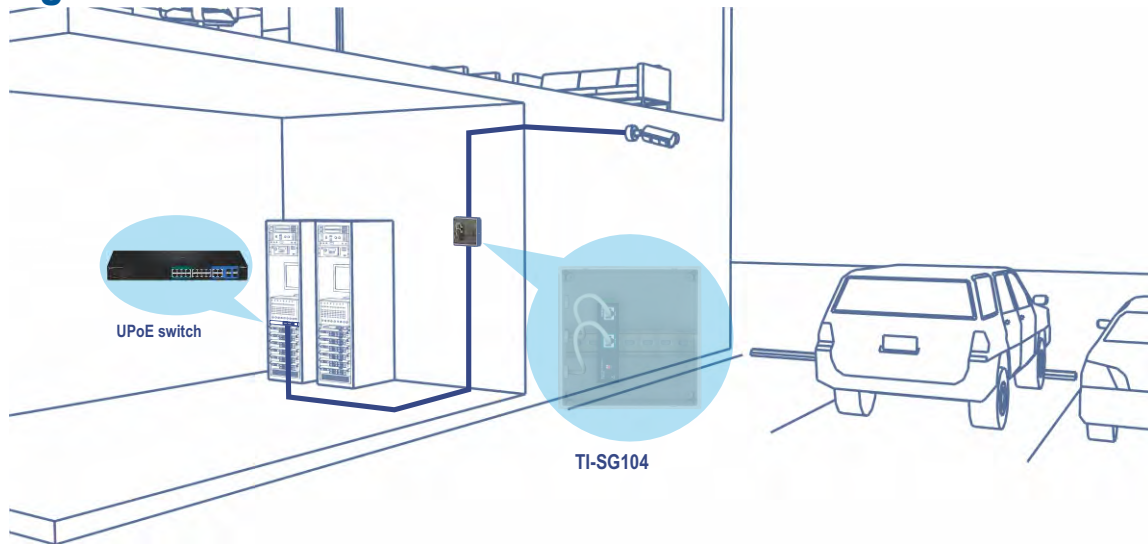

Gigabit Ethernet

1 x Gigabit UPoE input port, 1 x Gigabit output port



UPoE Powered

No power adapter necessary; the UPoE splitter takes a UPoE network connection and splits power and data into separate connections to network a non-PoE device with power up to 100m (328 ft.).



Adjustable Voltage Output

Convenient DIP switch adjusts voltage output to 12V (2.3A), 16V (2.3A), 24V (2.3A) or 48V (1.25A) to match non-PoE device power requirements



Dual DC Power Output Terminal Block

The UPoE splitter includes a dual DC power output terminal block, powering for up to two devices



Wall Mountable

Wall mountable design accommodates most installation scenarios

Specifications

Standards	<ul style="list-style-type: none"> • IEEE 802.3 • IEEE 802.3u • IEEE 802.3ab • IEEE 802.3af • IEEE 802.3at • IEEE 802.3bt compatible 										
Device Interface	<ul style="list-style-type: none"> • 1 x Gigabit port • 1 x Gigabit Ultra PoE in port • 4-pin removable terminal block (dual DC output) • Adjustable output power DIP switch (48V, 24V, 16V, 12V) • LED indicator • DIN-Rail mount • Wall mount • Grounding point 										
Data Transfer Rate	<ul style="list-style-type: none"> • Ethernet: 10Mbps (half duplex), 20Mbps (full duplex) • Fast Ethernet: 100Mbps (half duplex), 200Mbps (full duplex) • Gigabit: 2000Mbps (full duplex) 										
Special Features	<ul style="list-style-type: none"> • Hardened components rated for extreme temperatures • Dual DC power output • Auto-Negotiation • ESD 4kV and Surge 2kV protection 										
Power	<ul style="list-style-type: none"> • Input: 15.4W/30W/60W/95W PoE power • Max. Consumption: 7W (splitter only) • Max. Combined DC Output: 48V (1.25A), 24V (2.3A), 16V (2.3A), 12V (2.3A) <table border="1"> <thead> <tr> <th>PoE Input</th> <th>Max. DC Output (split between two devices)</th> </tr> </thead> <tbody> <tr> <td>95W</td> <td> <ul style="list-style-type: none"> • 48V(1.25A) DC Output: 60W • 24V(2.3A) DC Output: 55W • 16V(2.18A) DC Output: 35W • 12V(2.25A) DC Output: 27W </td> </tr> <tr> <td>60W</td> <td> <ul style="list-style-type: none"> • 48V(1.16A) DC Output: 56W • 24V(2.12A) DC Output: 51W • 16V(2.18A) DC Output: 35W • 12V(2.16A) DC Output: 26W </td> </tr> <tr> <td>30W</td> <td> <ul style="list-style-type: none"> • 48V(0.52A) DC Output: 25W • 24V(0.95A) DC Output: 23W • 16V(1.37A) DC Output: 22W • 12V(1.83A) DC Output: 22W </td> </tr> <tr> <td>15.4W</td> <td> <ul style="list-style-type: none"> • 48V(0.22A) DC Output: 10.6W • 24V(0.44A) DC Output: 10.7W • 16V(0.63A) DC Output: 10.2W • 12V(0.85A) DC Output: 10.2W </td> </tr> </tbody> </table>	PoE Input	Max. DC Output (split between two devices)	95W	<ul style="list-style-type: none"> • 48V(1.25A) DC Output: 60W • 24V(2.3A) DC Output: 55W • 16V(2.18A) DC Output: 35W • 12V(2.25A) DC Output: 27W 	60W	<ul style="list-style-type: none"> • 48V(1.16A) DC Output: 56W • 24V(2.12A) DC Output: 51W • 16V(2.18A) DC Output: 35W • 12V(2.16A) DC Output: 26W 	30W	<ul style="list-style-type: none"> • 48V(0.52A) DC Output: 25W • 24V(0.95A) DC Output: 23W • 16V(1.37A) DC Output: 22W • 12V(1.83A) DC Output: 22W 	15.4W	<ul style="list-style-type: none"> • 48V(0.22A) DC Output: 10.6W • 24V(0.44A) DC Output: 10.7W • 16V(0.63A) DC Output: 10.2W • 12V(0.85A) DC Output: 10.2W
PoE Input	Max. DC Output (split between two devices)										
95W	<ul style="list-style-type: none"> • 48V(1.25A) DC Output: 60W • 24V(2.3A) DC Output: 55W • 16V(2.18A) DC Output: 35W • 12V(2.25A) DC Output: 27W 										
60W	<ul style="list-style-type: none"> • 48V(1.16A) DC Output: 56W • 24V(2.12A) DC Output: 51W • 16V(2.18A) DC Output: 35W • 12V(2.16A) DC Output: 26W 										
30W	<ul style="list-style-type: none"> • 48V(0.52A) DC Output: 25W • 24V(0.95A) DC Output: 23W • 16V(1.37A) DC Output: 22W • 12V(1.83A) DC Output: 22W 										
15.4W	<ul style="list-style-type: none"> • 48V(0.22A) DC Output: 10.6W • 24V(0.44A) DC Output: 10.7W • 16V(0.63A) DC Output: 10.2W • 12V(0.85A) DC Output: 10.2W 										
Terminal Block	<ul style="list-style-type: none"> • Dual DC power outputs, 4 pin • Wire range: 0.34mm² to 2.5mm² • Solid wire (AWG): 12-24/14-22 • Stranded wire (AWG): 12-24/14-22 • Torque: 5 lb. – In / 0.5Nm / 0.56Nm • Wire strip length: 7-8mm 										

DIP Switch	DIP 1	DIP 2	Function
	OFF	OFF	48V output
	ON	OFF	24V output
	OFF	ON	16V output
ON	ON	12V output	
MTBF	• 684,452 hours		
Housing	<ul style="list-style-type: none"> • IP30 metal case • DIN-rail mount • Wall mount • Grounding point • 4KV ESD protection • 2KV surge protection 		
Operating Temperature	• - 40° – 75° C (-40° – 167° F)		
Operating Humidity	• Max. 95% non-condensing		
Dimensions	• 104 x 82 x 32mm (4.1 x 3.2 x 1.2 in.)		
Weight	• 172g (6 oz.)		
Certifications	<ul style="list-style-type: none"> • CE • FCC • IEC EN60950-1 • Shock (IEC 60068-2-27) • Freefall (IEC 60068-2-32) • Vibration (IEC 60068-2-6) 		
Warranty	• 3 year		

PACKAGE CONTENTS

- TI-SG104
- Quick Installation Guide
- Removable terminal block
- DIN-rail and wall mount kit

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • F: 1-310-961-5511 • sales@trendnet.com • www.TRENDnet.com

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit <http://www.trendnet.com>. Copyright © TRENDnet. All Rights Reserved.