




## 2-Port DisplayPort KVM Switch

TK-241DP (1.0R)

- DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with DisplayPort systems
- Resolutions & refresh rates
  - Up to 1920 x 1080 @ 144Hz
  - Up to 1920 x 1200 @ 144Hz
  - Up to 1920 x 1440 @ 144Hz
  - Up to 2560 x 1440 @ 144Hz
  - Up to 3440 x 1440 @ 60Hz
  - Up to 3840 x 2160 @ 60Hz
- 2-Port USB 2.0 hub for storage devices and other USB peripherals
- Required cabling sold separately (2x TK-CP06)
- No CD installation required

TRENDnet's 2-Port DisplayPort KVM Switch, model TK-241DP, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolution with this DisplayPort KVM switch, no driver installation required. The TK-241DP DisplayPort KVM switch is designed for systems with DisplayPort, USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or other USB peripherals between computers.




### DisplayPort 1.2

Designed to connect to two DisplayPort computers.



### 4K UHD Resolution


Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz).

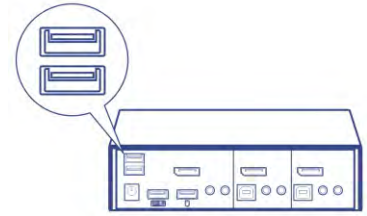

### USB 2.0 Hub

Two additional USB ports to connect storage drives and other USB peripherals.

## NETWORKING SOLUTION

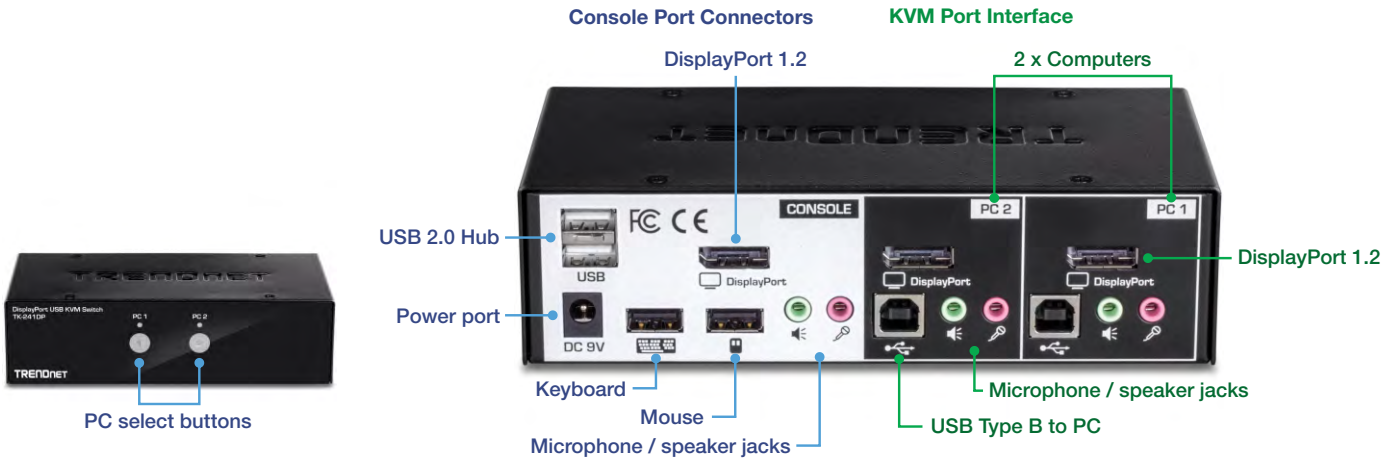

## FEATURES



### 2-Port Monitor KVM

Control up to two separate computers with up to 4K resolution



### DisplayPort Monitor

Designed to connect to two DisplayPort computers



### 4K UHD

Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)



### Audio Support

Full audio support maximizes work station productivity



### USB Mouse & Keyboard

True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs



### Housing

DisplayPort KVM switch with rugged metal enclosure



### USB 2.0 Hub

Two additional USB ports to connect storage drives and other USB peripherals



### Hot Keys

Hot Key command shortcuts



### Easy Installation

DisplayPort KVM switch features simple setup with driverless installation

## SPECIFICATIONS

### Console Port Connectors

- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 1 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### KVM Port Interface (up to 2)

- Keyboard/Mouse: USB Type B
- Monitors: 1 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Computer Interface (up to 2)

- Keyboard/Mouse: USB Type A
- Monitors: 1 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Monitor Resolution

- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

### Switching Control

- Front panel push buttons
- Keyboard hot key commands

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90% non-condensing

### Power

- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

### Dimensions

- 253 x 101 x 44mm (9.9 x 3.9 x 1.7 in.)

### Weight

- 920g (2.02 lbs.)

### Warranty

- 2 year

### Certifications

- CE
- FCC

### Package Contents

- TK-241DP
- Quick Installation Guide
- Power adapter (9V DC, 1A)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.