



2-Port Stackable Video Splitter

TK-V201S(1.1R)

The compact 2-Port Stackable Video Splitter (model TK-V201S) clones or repeats your computer's viewing field to multiple monitors (this product does not extend a single viewing field over multiple monitors). Support for 1920 x 1440 pixel resolution ensures crystal clear image quality.

Cascade up to three TK-V201S or TK-V401S units to add additional display monitors. Included is a 1.85 m (6 ft.) VGA cable to connect to a computer. LED indicators on the front of the unit convey connection status. No software installation required, simply Plug-and-Play to clone dazzling displays.

Features

- Clone or repeat your viewing field onto multiple monitors
- Supports monitors with a VGA port
- Supports display resolution of up to 1920 x 1440 pixels
- 2 x 15-pin VGA output ports and 1 x 15-pin VGA input port
- 1 x 15-pin VGA input port
- Daisy-chain up to 3 levels to add additional monitors
- Supports cable distances up to 65 m (210 ft.)
- Power LED indicator for power status monitoring
- Durable metal enclosure
- Plug-and-play, with no extra software required
- 2-year limited warranty


2-Port Stackable Video Splitter

TK-V201S(1.1R)

SPECIFICATIONS

| Hardware | |
|-----------------------|--|
| Video Input | • 1 x 15-pin VGA HDB Male (includes 1 x 1.85 m (6 ft.) VGA cable) |
| Video Output | • 2 x 15-pin VGA HDB Female |
| Resolution | • 1920 x 1440 |
| Signal Type | • WUXGA, HD, UXGA, SXGA+, SXGA, WSXGA, WXGA, XGA, SVGA, VGA, QVGA, and Multisync supported |
| Cable Distance | • 65 m (210 ft.) max. |
| Daisy-Chain (Cascade) | • Up to 3 levels |
| Cables (included) | • 1 x 15-pin VGA cable (male to female), 1.2 m (4 ft.) |
| Power | • 9V DC, 0.8A |
| LEDs | • Power |
| Dimension (L x W x H) | • 131 x 65 x 26mm (6.3 x 2.5 x 1in.) |
| Weight | • 400g (14.1oz) |
| Temperature | • Operation: 0°C~40°C (32°F~104°F) • Storage: -20°C~60°C (-4°F~140°F) |
| Humidity | • 90% (non-condensing) |
| Certifications | • CE, FCC |

NETWORKING SOLUTIONS

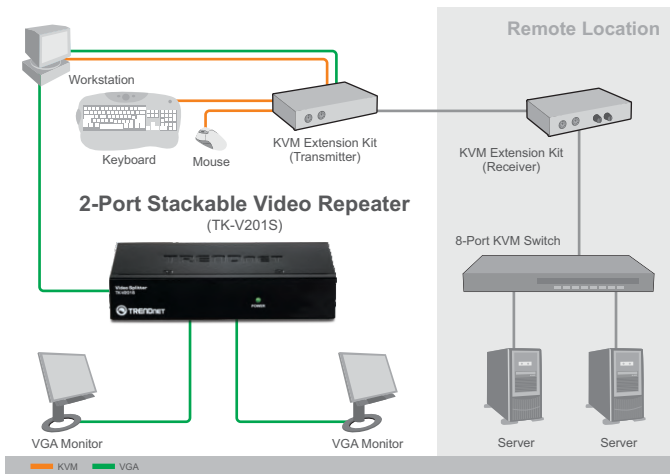

PACKAGE CONTENTS

- TK-V201S
- Multi-Language Quick Installation Guide
- Power adapter (9V DC, 0.8A)
- VGA cable (1.85m / 6ft.)

RELATED PRODUCTS

| | |
|----------|----------------------------------|
| TK-V401S | 4-Port Stackable Video Repeater |
| TK-EX3 | KVM Extension Kit |
| TK-RP08 | 8-Outlet Remote Power Controller |

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

