



USB 3.0 to Gigabit Adapter + USB Hub

TU3-ETGH3 (v2.0R)

- 1 x Gigabit Ethernet port
- 3 x USB 3.0 ports
- Windows[®] and Mac[®] compatible
- Flexible USB 3.0 cable accommodates most installations
- · Backward compatible with USB 2.0 and 1.1 devices
- · Supports Wake on LAN (Suspend Mode)


TRENDnet's USB 3.0 to Gigabit Adapter + USB Hub, model TU3-ETGH3, adds a Gigabit Ethernet port and three 5Gbps SuperSpeed USB 3.0 ports to a Windows® or Mac® computer. The USB adapter and hub combo offers easy installation – simply plug in flash drives, printers, scanners and other USB 3.0 devices at speeds ten times faster than a USB 2.0 connection. The TU3- ETGH3 is also compatible with USB 2.0 and 1.1 devices.

TRENDIET



USB 3.0

Easily connect up to three USB 3.0 devices to a USB 3.0 enabled desktop or notebook PC.




Gigabit Speeds

Experience full duplex 2Gbps connection speeds with this USB 3.0 Gigabit adapter.



Compatibility

The USB adapter and hub combination is compatible with Windows[®] and Mac[®] operating systems.

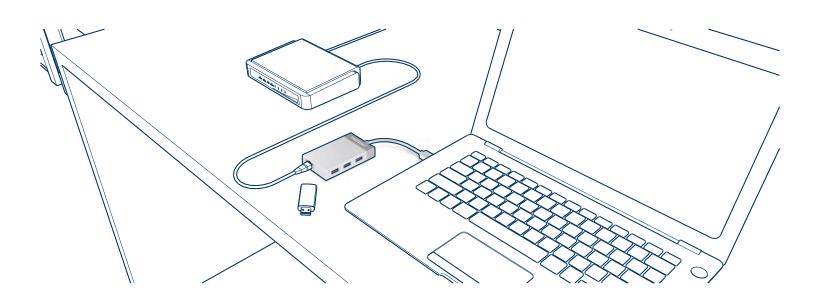



Gigabit Ethernet

Adds a Gigabit Ethernet port



Installation Flexibility

Integrated 14cm (5.5 in.) USB 3.0 cable accommodates most installation scenarios.



Backwards Compatibility

Compatible with USB 2.0 and 1.1 devices



USB 3.0

Easily connect up to three USB 3.0 devices to a USB 3.0 enabled desktop or notebook PC



Operating Systems

Compatible with Windows and Mac operating systems



LED Indicators

LED indicators display link and activity



Specifications

| Standards | • IEEE 802.3 • IEEE 802.3u • IEEE 802.3ab • IEEE 802.3x • IEEE 802.3az • USB 3.0 • USB 2.0 • USB 1.1 |
|----------------------|---|
| Interface | • 1 x USB 3.0 connector • 3 x USB 3.0 ports • 1 x Gigabit port |
| Maximum Data Rate | Up to 2Gbps (Gigabit port) Up to 5Gbps (USB port) |
| Special Features | Compact form factor Energy saving GREENnet technology Flexible USB 3.0 cable |
| USB Bus Powered | Output: 5V, 0.9A Consumption 4.5W (max.) |

| System Compatibility | • Windows: 10, 8.1, 8 • MacOS: 10.9 – 10.13 |
|--------------------------|--|
| Operating Temperature | • 0 - 40 °C (32 - 104 °F) |
| Operating Humidity | Max. 90% non-condensing |
| Certifications | • CE • FCC |
| Dimensions | • 92 x 55 x 16 mm (3.6 x 2.2 x .63 in.) • 54g (1.9 oz.) |
| Warranty | • 2 year limited |

PACKAGE CONTENTS

- TU3-ETGH3
- · Quick Installation Guide
- CD-ROM (Driver & User's Guide)