




4-Port USB 3.0 Mini Hub

TU3-H4E (v2.0R)

- No CD installation
- Add Four SuperSpeed 5Gbps USB 3.0 ports
- Convenient 14cm (5.5 in) integrated USB 3.0 cable
- Backward compatible with USB 2.0 ports
- Powered by USB port – No power adapter needed
- Compact design for easy on the go use

TRENDnet's 4-Port USB 3.0 Mini Hub, model TU3-H4E, instantly adds four 5Gbps SuperSpeed USB 3.0 ports to a computer. Easy installation – simply plug in flash drives, printers, scanners and other USB 3.0 devices at speeds ten times faster than a USB 2.0 connection. The TU3-H4E is also compatible with older USB 2.0 and 1.1 devices.




Compatibility

Compatible with Windows and Mac operating systems



USB 3.0


Easily connect up to four USB 3.0 devices to a USB 3.0 enabled desktop or notebook PC



Integrated Cable

Attached flexible 14cm (5.5 in.) USB 3.0 cable accommodates most installation scenarios

Networking Solution

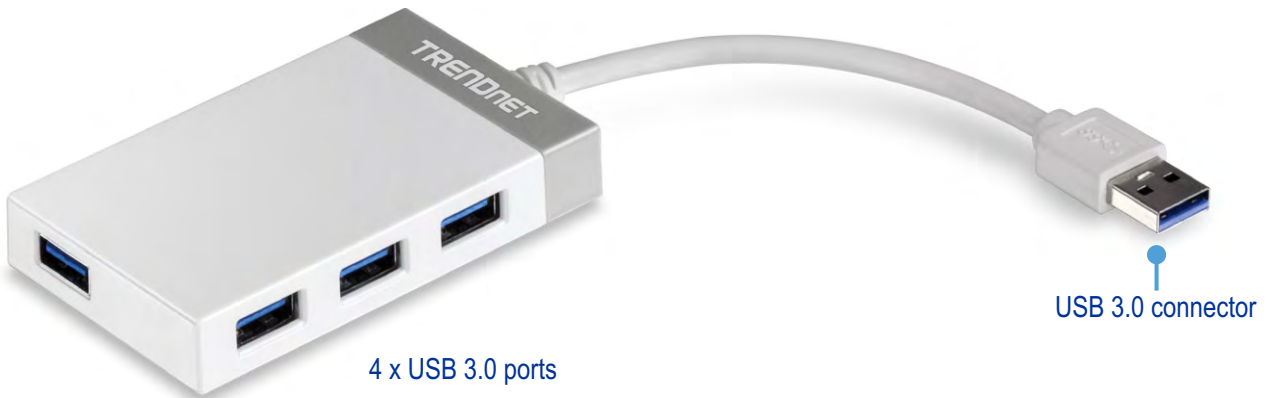

4 x USB 3.0 ports

USB 3.0 connector



Easy Setup

No CD installation



SuperSpeed USB 3.0

5Gbps USB 3.0 ports



USB Powered

No bulky power brick—compact adapter powered by USB port



Integrated Cable

Flexible 14cm (5.5 in) USB 3.0 cable accommodates most installation scenarios.



Backwards Compatibility

Compatible with USB 2.0 and 1.1 devices



Operating Systems

Compatible with Windows and Mac operating systems



LED Indicator

LED indicator confirms USB connectivity

Specifications

Standards	<ul style="list-style-type: none"> • USB 3.0 • USB 2.0 • USB 1.1
Interface	<ul style="list-style-type: none"> • 1 x USB 3.0 connector • 4 x USB 3.0 ports
Maximum Data Rate	<ul style="list-style-type: none"> • Up to 5Gbps
Special Features	<ul style="list-style-type: none"> • Compact form factor • Flexible USB 3.0 cable (14cm)
USB Bus Powered	<ul style="list-style-type: none"> • Output: 5V, 0.9A • Consumption 4.5W (max.)
System Compatibility	<ul style="list-style-type: none"> • Windows: 10, 8.1, 8 • MacOS: 10.9 – 10.13

Operating Temperature	<ul style="list-style-type: none"> • 0 - 40 °C (32 - 104 °F)
Operating Humidity	<ul style="list-style-type: none"> • Max. 90% non-condensing
Certifications	<ul style="list-style-type: none"> • CE • FCC
Dimensions	<ul style="list-style-type: none"> • 85 x 50 x 15mm (3.4 x 1.96 x 0.6 in.) • 46g (1.62 oz)
Warranty	<ul style="list-style-type: none"> • 2 year

PACKAGE CONTENTS

- TU3-H4E
- Quick Installation Guide