


## DIRECT BURIAL AUDIO CABLE 14 AWG / 2 Conductor

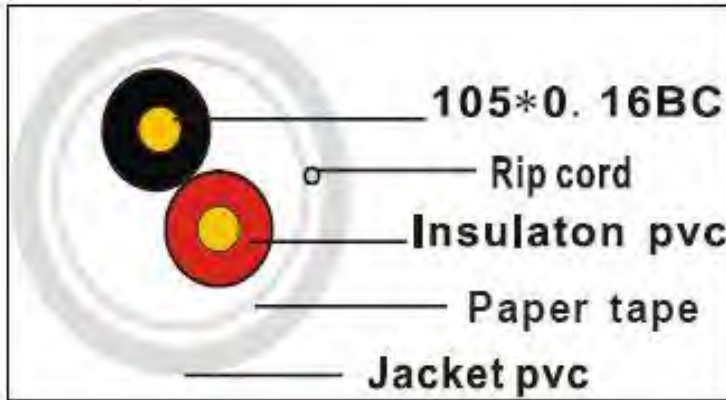

### Description

14/2 Stranded CMR/CL3R Direct Burial Sound Audio Cable

### Applicable Standards

- For Communication and Signal Control Systems
- 2 Oxygen Free Bare Copper Conductors in an Overall Jacket

### Physical Characteristics

Conductor		Oxygen Free B.C.
Number of Conductors		2
AWG		14
Stranding		105
Diameter	(inches)	0.0063
Insulation		PVC
Diameter	(inches)	0.1023
Nominal Wall	(inches)	0.0102
Jacket		FR-PVC
Overall Diameter	(inches)	0.2559
Nominal Thickness	(inches)	0.0196
Paper Tape		Yes
Rip Cord		Yes
Conductor Resistance	(ohms / 1000m)	10
Voltage	(volts)	300
Nominal Weight	(pounds)	27

### Colors

Insulation Colors Black / Red

### Part Numbers

Part Number	Color	Put-up
AC1402OSPBK4-500	Black	500' Reelex II

### Cable Marking

AUDIO CABLE 2 COND 14 AWG HI-STRAND OXYGEN FREE COPPER  
CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US  
\*\*\*FT