


DIRECT BURIAL AUDIO CABLE 14 AWG / 4 Conductor

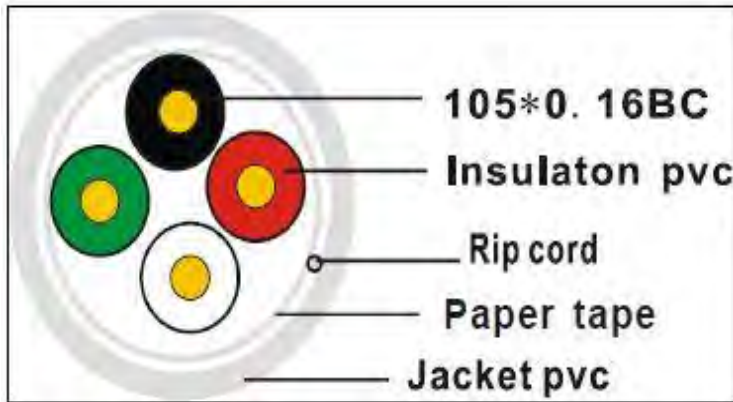

Description

14/4 Stranded CMR/CL3R Direct Burial Sound Audio Cable

Applicable Standards

- For Communication and Signal Control Systems
- 4 Oxygen Free Bare Copper Conductors in an Overall Jacket

Physical Characteristics

Conductor		Oxygen Free B.C.
Number of Conductors		4
AWG		14
Stranding		105
Diameter	(inches)	0.0063
Insulation		PVC
Diameter	(inches)	0.1023
Nominal Wall	(inches)	0.0102
Jacket		FR-PVC
Overall Diameter	(inches)	0.3149
Nominal Thickness	(inches)	0.0236
Paper Tape		Yes
Rip Cord		Yes
Conductor Resistance	(ohms / 1000m)	10
Voltage	(volts)	300
Nominal Weight	(pounds)	42

Colors

Insulation Colors Black / Red / White / Green

Part Numbers

Part Number	Color	Put-up
AC1404OSPBK4-500	Black	500' Reelex II

Cable Marking

AUDIO CABLE 4 COND 14 AWG HI-STRAND OXYGEN FREE COPPER
CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US
***FT