


16-2 Unshielded Plenum

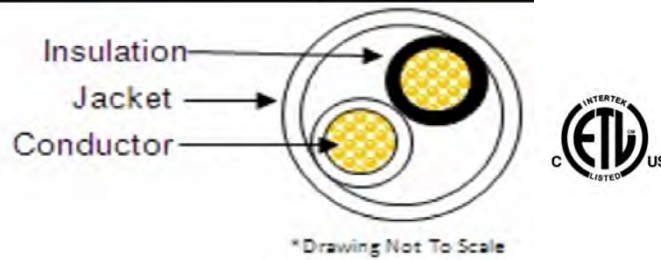

Applications

This document establishes the specifications for a plenum rated one pair unshielded cable used for communication applications.

Technical Details

Temperature Rating
 Operation: -2°C to +60°C
 Nominal Weight: 25 lbs. / 1,000 ft.

Construction Details

Number of Conductors: 2/C
 Conductor: 16AWG Stranded Bare Copper
 Insulation Material: Remguard Plenum Polymer
 Nominal Insulation Thickness: 0.007 in.
 Nominal Insulation Diameter: 0.072 in.
 Color Code: Black, Natrual
 Jacket Material: Remguard Plenum Polymer
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.175 in.
 Surface Print: 3122598 CMP 16AWG C(ETL)US
 FT6 + Sequential Footage Marking

Standards

NEC Article 800
 CMP Rating FT6

Codes & Listings

C(ETL)US CMP

Electricals

Suggested Working Voltage: 300 Volts, rms.

Insulation Colors

Black / Red

Part Numbers

Part Number	Color	Put-up
AC1602UPBK4-500	Black 500'	Reelex II

Toll. 888-492-8363

Tel. 310-885-4200