


RG-6/U 60% CATV 75Ω Coaxial Cable

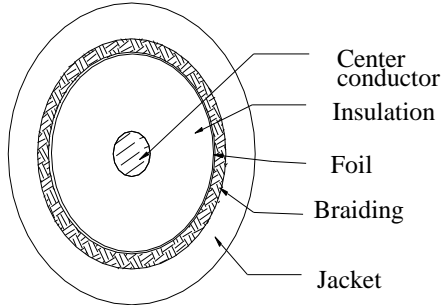

Description

RG-6/U 60% CMR CATV 75 Ω Coaxial Cable

Applicable Standards

Reference Standard

SCTE IPS-SP-001 UL 1655, UL 13, UL 444, ROHS

Physical Characteristics

| Conductor | | Solid | Copper Clad Steel |
|-----------------------|------------------------------------|-------|-------------------|
| AWG | | | 18 |
| Diameter | (inches) | | 0.04 |
| Insulation | | | Foam Polyethylene |
| Nom. Thickness | (inches) | | 0.073 |
| Insulation Diameter | (inches) | | 0.186 |
| Braid Shield | | | Aluminum Wire |
| Coverage Area | (%) | | 60 |
| Braid Diameter | (inches) | | 0.213 |
| Jacket | | | PVC |
| Cable Diameter | (inches) | | 0.2716 |
| Nom. Thickness | (inches) | | 0.0295 |
| Nominal Weight | 500' | | 16 lbs. |
| | 1,000' (Pullbox & Reel) | | 30 lbs. |

Cable Marking

RG6/U 18AWG CMR FT4 XXXXXX VERIFIED TO C(ETL)US CATV
SWEPT TO 3.0 GHZ ****FT

Electrical Performance

| Frequency (MHz) | Attenuation (dB/100m) | Frequency (MHz) | Attenuation (dB/100m) |
|--------------------|--------------------------|--------------------|--------------------------|
| 5 | 2.66 | 550 | 16.70 |
| 55 | 5.25 | 600 | 17.52 |
| 211 | 10.10 | 750 | 19.69 |
| 250 | 11.02 | 870 | 21.33 |
| 270 | 11.48 | 1000 | 22.97 |
| 300 | 12.14 | 1250 | 25.00 |
| 350 | 13.15 | 1450 | 26.37 |
| 400 | 14.11 | 2200 | 31.16 |
| 450 | 15.03 | 2400 | 32.83 |
| 500 | 15.88 | 3000 | 37.88 |

Electrical Characteristics

| | | |
|-------------------------|---------------|-----------|
| Temperature Rating | (°C) | -20 to 60 |
| Impedance | (± 3.0 Ohms) | 75 |
| Capacitance | (pF/ft) | 15.5 |
| Conductor DCR@20° C | (ohms/1000ft) | 28.6 |
| Velocity of Propagation | (%) | 84 |
| ROHS Compliant | | Yes |

Part Numbers

| Part Numbers | Color | Put-up | |
|--------------|-------|--------|---------|
| RG6URBK1-500 | Black | 500' | Pullbox |
| RG6URBK1 | Black | 1,000' | Pullbox |
| RG6URBK2 | Black | 1,000' | Reel |
| RG6URWH1-500 | White | 500' | Pullbox |
| RG6URWH1 | White | 1,000' | Pullbox |
| RG6URWH2 | White | 1,000' | Reel |