


Security Shielded Stranded Cable 22 AWG / 6 Conductor

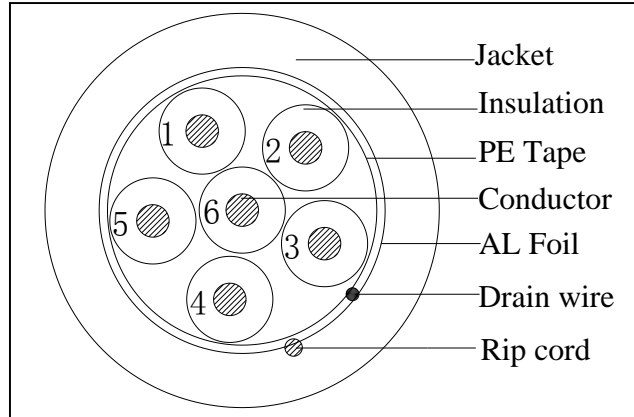

Description

22/6 Shielded Stranded Bare Copper CMR Security Cable

Applicable Standards

- Class 2 Power Limited Circuit Cable and Communications
- Cable for General Purpose Applications

Physical Characteristics

| Conductor | | Stranded Bare Copper |
|--------------------------|----------|----------------------|
| Number of Strands | | 7 |
| Number of Conductors | | 6 |
| AWG | | 22 |
| Insulation | | PVC |
| Avg. Thickness | (inches) | 0.0075 |
| Diameter | (inches) | 0.0433 |
| PE Tape | | Yes |
| Al Foil Shield | | Yes |
| Assembly Diameter | | 0.1496 |
| Jacket | | PVC |
| Avg. Thickness | (inches) | 0.0216 |
| Overall Diameter | (inches) | 0.1968 |
| Nomial Weight | (pounds) | 28 |

Colors

Insulation Colors Red, Green, Black, White, Brown, Blue

Part Numbers

| Part Number | Color | Put-up |
|---------------|-------|------------|
| SC2206SRWH1-S | White | 1,000' Box |

Cable Marking

**22AWG 6 COND STRANDED SHIELDED XXXXXX CMR FT4 C(ETL)US
****FT**