

V Zenit MIX antenna High-VHF/UHF

The best balance between robustness and compactness

The V Zenit MIX antenna combines two antennas in one for a mixed OTA signals reception. The UHF part consists in a V-type structure, formed by two vertically stacked Yagi in phase, which provides an exceptional rate of gain to compactness.

Additionally, a dipole and a set of specific reflectors are added for High-VHF reception.

For UHF reception it includes a filtering feature with a high rejection for bands beyond channel 51, without losing flatness in the frequency response of the pass-band (channels 14-51).

Ref.	149321
Logical ref.	ZENITVU2
EAN13	8424450184226

Other features

Colour	Orange
Power Supply Unit	Not included
Supply method	Single packing

Packaging info

Physical data

Net weight	1,794.00 g
Gross weight	1,794.00 g
Width	1,142.00 mm
Height	552.00 mm
Depth	866.00 mm
Main product weight	1,794.00 g

Box 1 pcs.

Carton 6 pcs.


Highlights


- Quick and secure reflector assembly system
- Robust mechanics with outstanding performance in vibrating situations
- Compact: excellent ratio between gain and length
- Flatness of the frequency response in the UHF band

Discover

- Built with aluminium (corrosion resistant) for a long service life, and in ABS plastic for high weather resistance
- The mast-mounting system utilizes Zamak to provide sturdiness and stability in adverse weather conditions
- Designed and manufactured in Europe, our products undergo the most stringent quality controls
- The connection box includes a balun for impedance matching

Graphic documentation

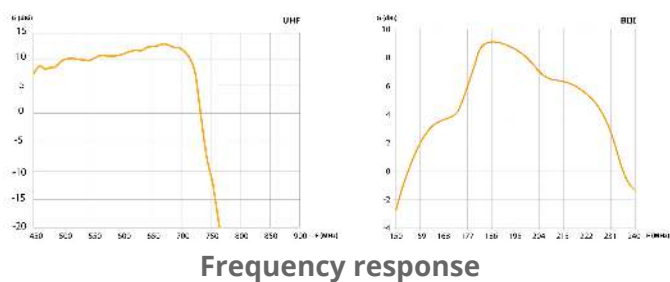

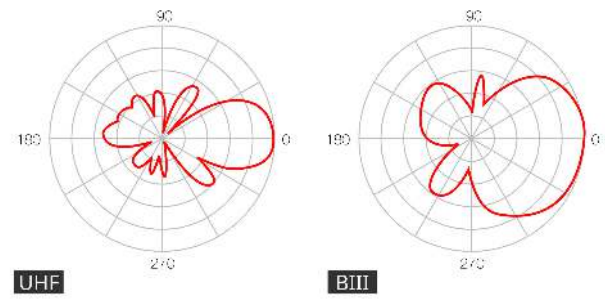

Radiation pattern

Technical specifications : Ref. 149321

Bands		BIII	UHF
Frequency range	MHz	174 ... 230	470 ... 698
Channels		5 ... 12	21 ... 48
Gain	dBi	8.5	15
F/B ratio	dB	> 12	> 23
Wind load (@130Km/h)	N		96
Wind load (@150Km/h)	N		132