



## 4-Port USB KVM Switch Kit TK-407K (v1.3R)

The 4-Port USB KVM Switch Kit lets you manage four PCs with just one set of keyboard, monitor, and mouse. Switch between 4 PCs with a simple press of a button! Separate sets of KVM cables are included with the KVM Switch, so users can start controlling 4 PCs instantly. The KVM cables also provide power to the KVM Switch, eliminating the need for a power adapter. Hot Key operations provide immediate access to features such as computer switching, and auto-scanning. With its Hot-Plug, and Audible Feedback, the 4-Port USB KVM Switch is the perfect choice for managing multiple PCs.

### PRODUCT OVERVIEW

- 4-Port KVM switch with VGA and USB connections to computers
- Device monitoring with Auto-Scan and audible feedback
- High quality 2048 x 1536 resolution for a crisp display
- Supports most operating systems and advanced mouse designs
- All required cabling included

### FEATURES

- Control up to 4 computers / servers with one set of console devices
- USB keyboard / mouse emulation with 4 sets of detachable KVM cables
- Compliant with Windows, Linux, and Mac OS
- High video quality, up to 2048 x 1536 VGA resolution
- Auto-Scan and LED display for computer monitoring
- Keyboard status restored when switching between computers
- Computer selection by front panel push buttons, keyboard hot key commands or Windows-based client switching software\*
- User definable hot key (Windows only)
- Plug & Play and hot-pluggable
- USB interface power method
- 2-year limited warranty

\* Please go to <http://www.trendnet.com/downloads> to download the client switching software



## SPECIFICATIONS


### HARDWARE

<b>Connections</b>	• 4 computers	
<b>USB Interface</b>	• USB 1.1 compliant	
<b>KVM Cable</b>	• 2 sets of 1.2m (4ft.) USB KVM cables • 2 sets of 1.8m (6ft.) USB KVM cables	
<b>Cable Interface (all male)</b>	<b>To KVM</b>	<b>To Computer</b>
	• 1 x VGA / SVGA HDB 15-pin	• 1 x USB (Type A) • 1 x VGA / SVGA HDB 15-Pin
<b>PC Port Connectors</b>	• 4 x VGA / SVGA HDB 15-pin (female)	
<b>Console Port Connectors</b>	• 2 x USB keyboard / mouse (type A) • 1 x VGA / SVGA 15-pin HDB (female)	
<b>Computer Selection</b>	• Face panel push buttons, keyboard hot key commands or Windows-based client switching software*	
<b>Supported OS</b>	• Windows, Linux and Mac.	
<b>Auto-Scan Interval</b>	• 10 seconds	
<b>Keyboard Status</b>	• Save and restore	
<b>Power Type</b>	• USB interface power	
<b>Dimensions</b>	• 167 x 80 x 28 mm (6.6 x 3.2x 1.1 in.)	
<b>Weight</b>	• 159 g (5.6 oz.)	
<b>Temperature</b>	• Operating: 0°C ~ 40°C (32°F ~104°F) • Storage: -20°C ~ 60°C (-4°F ~140°F)	
<b>Humidity</b>	• Max 90% (non-condensing)	
<b>Certifications</b>	• CE, FCC	



## NETWORKING SOLUTIONS

### 4-Port USB KVM Switch Kit TK-407K

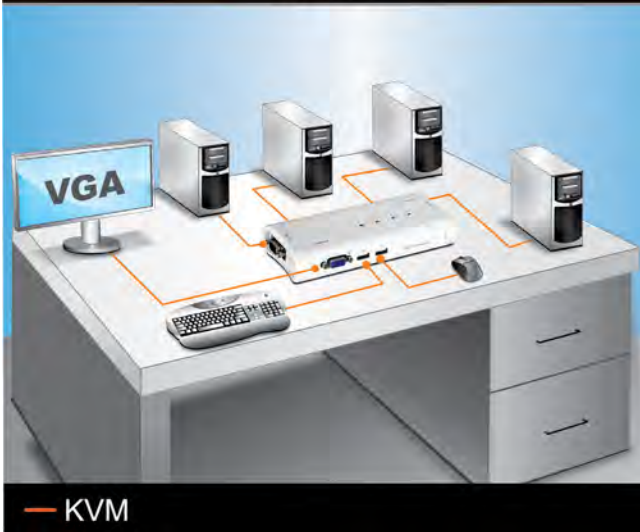

## PACKAGE CONTENTS

TK-407

Quick Installation Guide

4 sets of USB KVM Cables (2 x 1.2 m / 4 ft., 2 x 1.8 m / 6 ft.)

## RELATED PRODUCTS

TK-207K	2-Port USB KVM Switch Kit
TK-408K	4-Port PS/2 KVM Switch Kit with Audio
TK-409K	4-Port USB KVM Switch Kit with Audio

## CONTACT INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**

