


C2R-CHYNA

Radio Replacement interface for 2004+ Chrysler, Dodge and Jeep vehicles with Factory Radio Models REF, REC, RAQ and RAK.

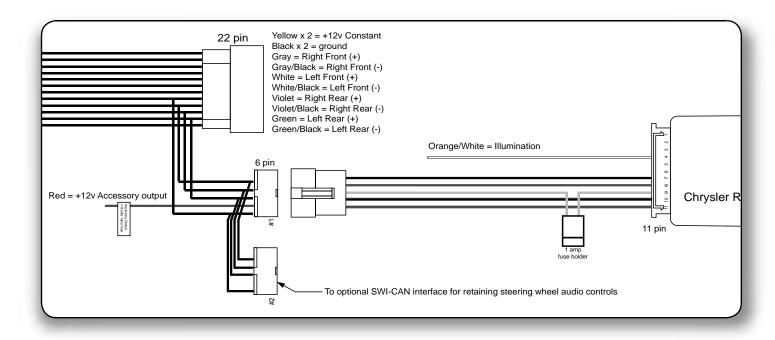

For Use with Aftermarket Radios to Retain Accessory Power

• Retains Accessory Power for Approximately 10 Minutes or Until A Door is Open

Installation:

- 1. Only for Vehicles Without a Factory Amplifier: Connect the aftermarket radio's front and rear speaker wires to the 22 pin plug.
- 2. The 22 pin harness has two yellow and two black wires. Connect both yellows to the radio's +12v constant wire and both blacks to the radio's ground wire.
- **3.** The Accessory wire is located on the 6 pin harness connect this wire to the radio's accessory wire. The accessory wire supplies +12v, 1 amp max, when key is in the Accessory or Ignition position.
- **4.** 11 pin plug: Orange/White Connect this wire to the radio's Illumination input wire only. Note: Do not connect these wires to any other circuit besides the radio's wire harness.
- **5.** When all connections are made, connect the 22 pin plug into the vehicle's 22 pin harness.

DISCLAIMER: Under no circumstances shall the manufacturer or the distributors of the C2R-CHYNA parts be held liable for consequential damages sustained in connection with the C2R-CHYNA. The manufacturer and it's distributors will not, nor will they authorize any representative or any other individual to assume obligation or liability in relation to the C2R-CHYNA other than its replacement.

Pacific Accessory Corporation

1502 S. Santa Fe St. Santa Ana, CA 92705 Voice: 714-835-3022 • Fax: 714-835-3233 www.pac-audio.com