

Description

One 4 Pair Cat5E UTP Cable
Complies to TIA 568-C.2
24 Awg Solid Bare Copper Conductor / PE Insulation

One Audio Cable 16/4
16 AWG Oxygen Free Bare Copper
4 Conductors

Applicable Standards

For use in Home Network Systems
Reference Standard
SCTE IPS-SP-001, TIA-568-C.2

Physical Characteristics

CAT5E TUP LAN CABLE	For details, please see Attachment 1
Audio 16/4 Cable	For details, please see Attachment 2
Nominal Weight	40 lbs.

Cable Marking

CATEGORY 5E 350 MHZ 4PR 24AWG AND 4 COND 16AWG
AUDIO CABLE CMR C(ETL)US 4003289 ****FT

Electrical Performance

CAT5E UTP LAN CABLE	For details, please see Attachment 1
Audio 16/4 Cable	For details, please see Attachment 2

Electrical Characteristics


CAT5E UTP LAN CABLE	For details, please see Attachment 1
Audio 16/4 Cable	For details, please see Attachment 2

Mechanical Characteristics

Test Object		Outer Jacket	
Test Material		PVC	
Before	Tensile Strength (Mpa)	≥1.034	
Aging	Elongation (%)	≥200	
	Aging Condition (°C x hrs)	113.0 ± 1.0 x 168	
After	Tensile Strength (Mpa)	≥85% unaged	
Aging	Elongation (%)	≥50% unaged	
	Cold Bend (-20 ± 2°C x 4 hrs)	No crack	

Part Numbers

Part Number	Color	Put-up
H15E164MYL2-500	Yellow	500' Reel

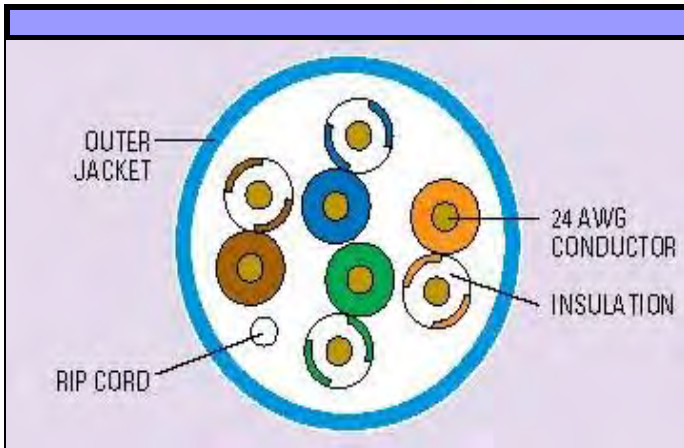

Description

24 AWG Cat5E CMR, High-Performance Data Cable

Applicable Standards

- ETL Listed Type CMR
- C(ETL) listed CMG FT4
- ETL Verified to TIA - 568-C.2, and ISO/IEC 11801
- ROHS Compliant
- ATM 155 Mbps
- Ethernet 10BASE-T, 100BASE-TX, 100BASE-VG, 100BASE-T4,
- 1000 Mbps 1000BASE-T Gigabit Ethernet™ (IEEE 802.3)
- 16 Mbps Token Ring™ (IEEE 802.5)

Physical Characteristics

Number of Conductor Pairs	4
Size	24 AWG
Stranding	Solid
Conductor Material	Solid Annealed Bare Copper
Shield Material	Unshielded
Rip Cord	Yes
Insulation Material	Polyethylene
Insulation Overall Diameter	0.035 in. ± 0.0002 in.
Insulation Average Thickness	0.0081 in.
Jacket	Flame Retardant PVC
Outer Jacket Average Wall Thickness	0.023 in.
Outer Jacket Nominal O.D.	0.200 in. ± 0.008 in.

Mechanical Characteristics

Temperature Rating	Installation	0 to + 60°C
	Operating	-20°C to + 75°C
Tensile Strength	Before	> = 13.8 Mpa
	Aging	> = 100%
Aging Condition		100°C x 240 hours
	After Aging	> = 85% of unaged > = 50% of unaged

Color Code

Pair 1	White / Blue	Blue
Pair 2	White / Orange	Orange
Pair 3	White / Green	Green
Pair 4	White / Brown	Brown

Electrical Performance

Frequency (MHz)	Attenuation (dB/100m)		Return loss (dB)		NEXT (dB)		PS-NEXT (dB)	
	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
0.772	1.8	1.5	23.0	33.0	72.0	81.1	70.0	78.7
1	2.0	1.8	23.0	38.6	70.3	79.4	68.3	76.9
4	4.1	3.6	23.0	39.8	61.2	69.9	59.3	67.4
8	5.8	5.1	24.5	38.2	56.8	61.9	54.8	59.4
10	6.5	5.8	25.0	38.0	55.3	62.4	53.5	59.9
16	8.2	7.4	25.0	37.4	52.3	57.8	50.3	55.2
20	9.3	8.2	25.0	36.8	50.8	56.4	48.8	53.8
25	10.4	9.3	24.3	35.2	49.3	56.3	47.3	53.6
31.25	11.7	10.5	23.6	33.3	47.9	53.8	45.9	51.1
62.5	17.0	14.9	21.5	32.2	43.4	49.8	41.4	47.4
100	22.0	19.2	20.1	31.3	40.3	47.5	38.3	45.0
155	28.1	24.2	18.8	29.8	37.4	45.1	35.4	42.6
200	32.4	27.3	18.0	28.5	35.7	43.3	33.7	40.2
250	38.9	30.9	17.5	27.3	34.8	41.4	32.5	39.0
300	41.0	34.1	16.8	25.6	33.1	40.2	31.1	37.7
350	44.9	37.8	16.3	23.2	32.1	39.0	30.1	36.5

Frequency (MHz)	ELFEXT (dB)		PS-ELFEXT (dB)		ACR (dB)		PS-ACR (dB)	
	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
0.772	66.0	73.3	63.0	72.7	70.2	79.2	68.2	77.0
1	63.8	71.3	60.8	70.6	68.2	77.6	66.3	75.0
4	51.7	59.4	48.7	58.7	57.2	66.3	55.2	63.5
8	45.7	53.2	42.7	51.1	51.0	59.8	49.0	56.9
10	43.8	50.5	40.8	49.7	48.8	56.6	47.0	53.7
16	39.7	47.0	36.7	45.1	43.0	53.0	42.1	47.4
20	39.7	45.0	34.7	43.6	41.5	50.5	39.5	45.0
25	35.8	43.3	32.8	42.0	38.9	47.0	36.9	43.7
31.25	33.9	41.3	30.9	40.5	36.5	43.3	34.2	40.0
62.5	27.8	35.8	24.8	34.5	26.4	35.0	24.4	31.2
100	23.8	31.3	20.8	30.3	18.3	26.2	16.3	24.2
155	19.9	27.5	16.9	26.9	10.0	20.9	7.3	15.9
200	17.7	24.7	14.7	24.5	5.0	16.0	2.0	10.0
250	17.1	22.2	14.0	22.5	0.0	10.6	-	4.0
300	16.7	20.5	13.5	20.7	-	6.1	-	-1.3
350	16.0	19.4	12.8	19.6	-	1.2	-	-6.4

* Values above 100MHz are information only

Electrical Characteristics

Maximum Conductor DC Resistance @ 20°C	9.38 Ω / 100 Meters
Maximum DC Resistance Unbalanced @ 20°C	5%
Maximum Pair-to-Pair Ground Capacitance Unbalanced	330 pF / 100 Meters
Characteristic Impedance (1 ~ 350 MHz)	100 ± 15 Ω
Mutual Capacitance	5.6 nF / 100 Meters
Maximum Delay Skew	40 nS / 100 Meters

**AUDIO CABLE
16 AWG / 4 Conductor**



Description

16/4 Stranded CMR/CL3R Sound Audio Cable

Applicable Standards

- For Communication and Signal Control Systems
- 4 Oxygen Free Bare Copper Conductors in an Overall Jacket

Physical Characteristics

Conductor		Oxygen Free B.C.
Number of Conductors		4
AWG		16
Stranding		65/34
Diameter	(inches)	0.0063
Dia. Over Dielectric	(inches)	0.058
Insulation		Fire Retardant PVC
Dia. Over Dielectric	(inches)	.092 nom
Jacket		Fire Retardant PVC
Dia. Over Dielectric	(inches)	0.28
Nom. Jacket Thickness	(inches)	0.022
Min. Spot	(inches)	0.018
Conductor Resistance	(ohms)	3.7

Cable Marking

Insulation Colors Black / Red/ White/ Green